



Specification For Approval

Customer : _____
Description : _____ EC FAN _____
Customer Part No. : _____ Rev : _____
Delta Model No. : _____ GTB040EUD24R N1 _____ Rev : X06
Safety Model No. : _____ GTB040EUD24 _____
Sample Issue No. : _____
Sample Issue Date : _____ 02/22/2017 _____

Please send one copy of this specification back after you
signed approval for production pre-arrangement

Approved by : _____

Date : _____

Delta Electronics, Inc.

No.252, Shangying Road, Guishan Industrial Zone,
Taoyuan City, 33341, Taiwan

TEL : +886-3-359-1968

FAX : +886-3-359-1991

*** SAMPLE HISTORY ***

CUSTOMER :

CUSTOMER P/N :

DELTA MODEL : GTB040EUD24R N1

REV	DESCRIPTION	DRAWN	CHECKED		APPROVED	ISSUE DATE
			ME	EE		
X05	ISSUE SPEC.	邱靜美 01/24'17	邱靜美 01/24'17	林科亦 01/24'17	顏承偉 01/24'17	01/24'17
X06	MODIFY Pmax. & BEARING SYSTEM; DIMENSION DRAWING.	邱靜美 02/22'17	邱靜美 02/22'17	林科亦 02/22'17	顏承偉 02/22'17	02/22'17

Electronically Commutated (EC) Fan

Centrifugal Fan

φ 404 x 245 mm



Delta Electronics, Inc.
No.252, Shangying Road, Guishan
Industrial Zone, Taoyuan City, 33341,
Taiwan
TEL: +886-3-359-1968
FAX: +886-3-359-1991
www.deltaww.com




Technical features

Input Side	
Nominal Voltage	1~ 230Vac 50/60Hz
Input Source	1~ 200Vac - 277Vac
Power @ Free air	490 W
Power @ Max. load	800 W
Output Side	
Speed (RPM)	1845
Qmax. (CMH / CFM)	4373 / 2574
Pmax. (Pa / inAq)	702 / 2.84
Noise (dB-A) @ Qmax.	77.0
Functions	
Active power factor correction	
Control input 0-10VDC / PWM / 4-20mA.	
Output +10VDC (±10%), max. 10mA.	
Control voltage output: 0-10VDC.	
RS485 control bus	
Alarm relay, Locked rotor protection, Soft start.	
Speed telling, Frequency generator signal.	
Voltage / Current monitoring.	

Physical	
Rotation Direction	CW, Seen on rotor
Material (Impeller / Frame)	Aluminum sheet / Die-cast aluminum
Bearing system	Ball bearings
Weight (kg)	10.5
Electrical leads	Via terminal block
Environmental	
Operating temperature range	-25 ~ +60 °C
Storage temperature range	-40 ~ +70 °C
Safety	
Safety	UL; cUL; TUV
IP Level	IP54
EMC	EN61000-6-2/4, EN61000-3-2/3
Protection class	I
Insulation class	B
Leakage current	≤ 3.5 mA
Motor protection	Over temperature protected
Life expectancy	60,000 hrs at 40 °C / 15 ~ 65 %RH

NOTE: Delta reserves the right to change specifications and other product information without prior notice.

P & Q curves

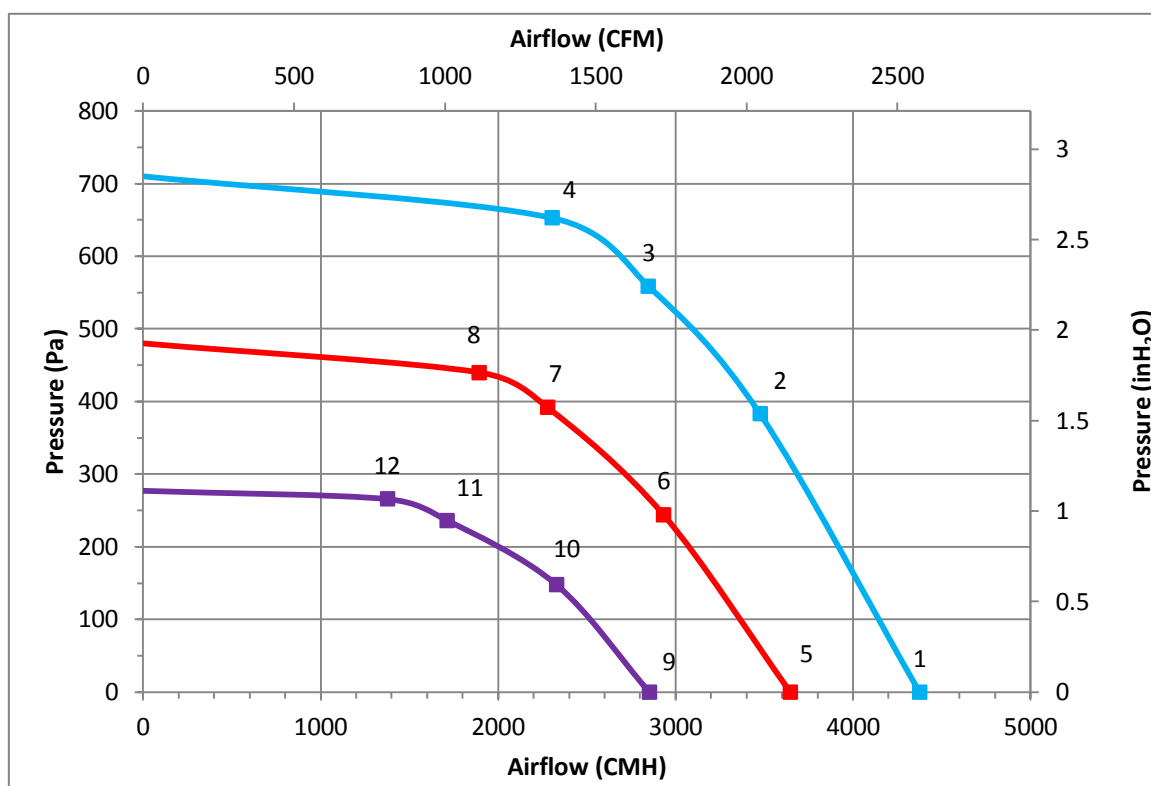

Measure data:


	P [Pa]	Q [CMH]	N [R.P.M.]	P1 [W]	I [A]	Lp [dB(A)]
1	0	4374	1850	490	2.17	77.0
2	383	3475	1851	734	3.23	
3	559	2847	1851	790	3.47	
4	653	2303	1856	776	3.41	
5	0	3646	1550	288	1.32	72.5
6	244	2932	1547	430	1.93	
7	392	2277	1545	458	2.05	
8	440	1894	1552	450	2.02	
9	0	2851	1200	142	0.73	67.0
10	148	2328	1196	201	0.97	
11	236	1713	1195	220	1.04	
12	266	1375	1195	210	1.01	

Test Condition :


- Input Voltage: Nominal Voltage
- Temperature : Room Temperature
- Humidity : 65%RH
- Measured with inlet cone.
- Noise (Lp) is measured at a distance of one meter from the inlet side.

Dimension drawing

Label :

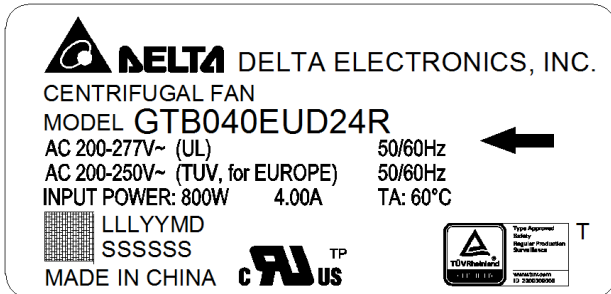

Fan :

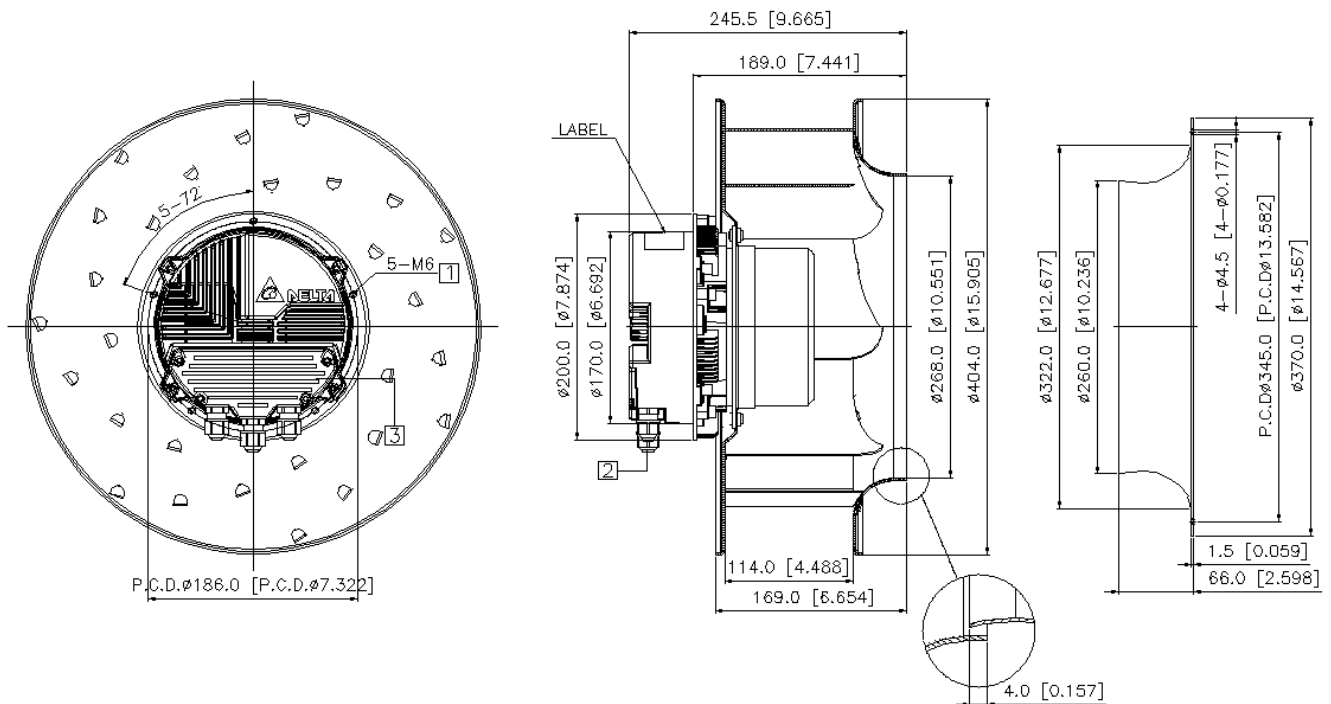


Note :

1. Depth of screw : 12 ~16 mm.
2. Cable Diameter : $\phi 6.0$ ~ $\phi 10.0$ mm
3. Open the cover and refer to definition of terminal block.


UNIT : mm[INCH]






Definition of terminal block

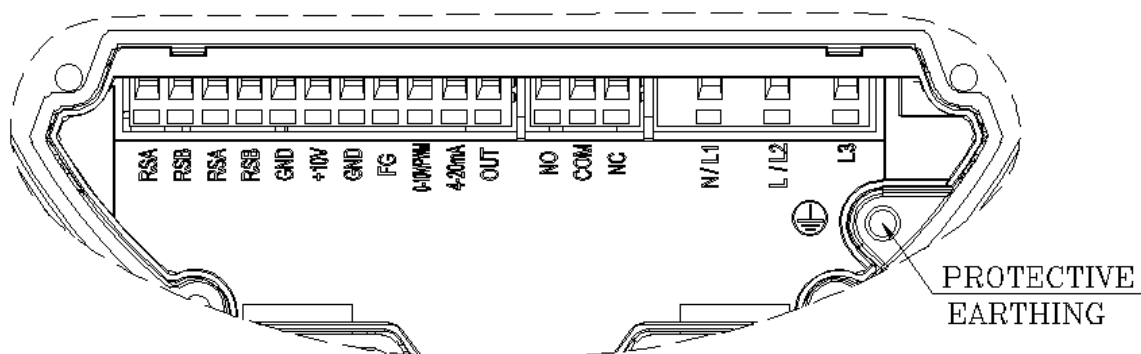


	Text	Functions
Power	N/L1	Neutral / AC mains
	L/L2	AC mains
	L3	--
Status	NO	Alarm relay, open by failure
	COM	Alarm relay, common (2A/250VAC)
	NC	Alarm relay, close by failure
Signal	RSA	RS485-A
	RSB	RS485-B
	RSA	RS485-A
	RSB	RS485-B
	GND	Ground
	+10V	+10V output, MAX 10mA (For external potentiometer)
	GND	Ground
	FG	Frequency generator (FG) signal
	0-10V/PWM	Speed control ,input 0-10VDC
	4-20mA	Speed control ,input 4-20mA
	OUT	Control voltage output 0-10VDC (For external potentiometer)


Lead wire connection:

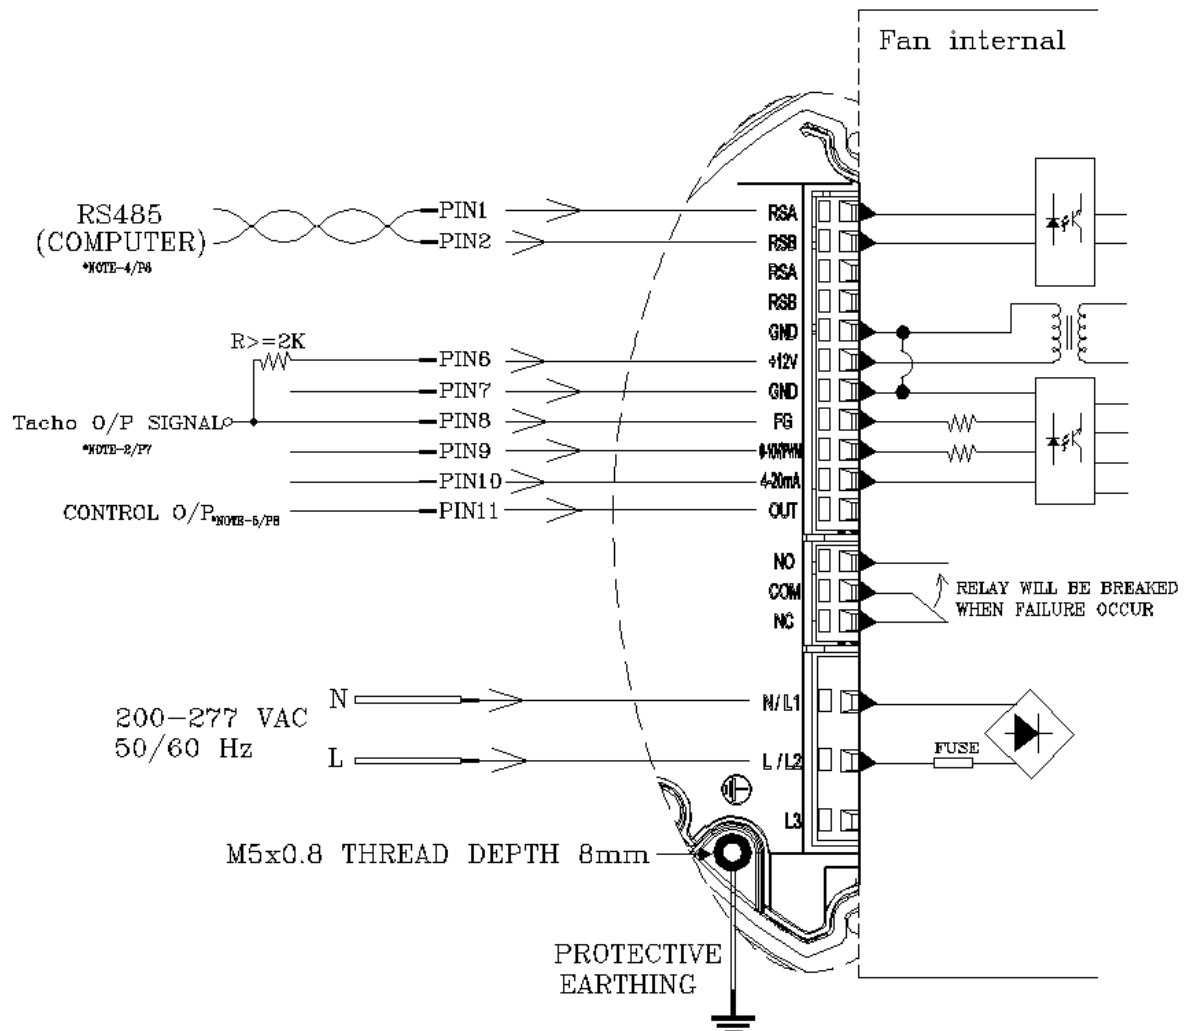

Speed setting	
Full Speed 	Short PIN6 & PIN9 Fan will run full speed.
Voltage Control A 	Connector 1-10kΩ variable resistor Between +10VDC with GND and 0-10V/PWM Turn the variable resistor · can change the '0-10V/PWM' voltage (0...10V) °
Voltage Control B 0-10V DC Source 	Use voltage source support 0~10VDC voltage DC+ : connector PIN9(+) DC - : connector PIN7(-)
PWM Control PWM Generator 	PWM duty control PWM amplitude is 10VDC(+ -5%) Frequency Range is 100Hz...100kHz -PWM duty higher than 15%, fan start up ° -PWM duty lower than 5%, fan stop °
Current Control 4-20mA Current Source 	4~20mA Current Control Open 0-10V/PWM PIN - Lower than 4.5 mA → Fan Stop - Higher than 6.0 mA → Fan Start up - Higher than 19.5 mA → Maximum Speed

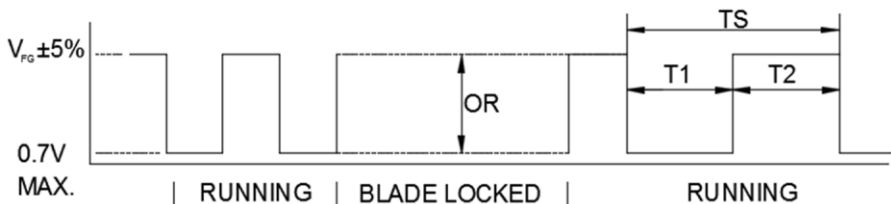Signal function																	
RS485 control function	RS485 control function -Select the control mode of speed, fixed speed or fixed PWM duty -Speed and power consumption feedback. -Allow multiple FANs control and status patrol.																
Control O/P	The analog signal level is the derivative of current control level. <table><tr><th>Current (mA)</th><th>Control O/P (VDC) (REF)</th></tr><tr><td>4.0</td><td>0.2</td></tr><tr><td>6.2</td><td>1.47</td></tr><tr><td>13.7</td><td>5.96</td></tr><tr><td>18.7</td><td>8.95</td></tr><tr><td>20.0</td><td>9.65</td></tr></table>		Current (mA)	Control O/P (VDC) (REF)	4.0	0.2	6.2	1.47	13.7	5.96	18.7	8.95	20.0	9.65			
Current (mA)	Control O/P (VDC) (REF)																
4.0	0.2																
6.2	1.47																
13.7	5.96																
18.7	8.95																
20.0	9.65																
Voltage/PWM control	The speed comparison will control level <table><tr><th>Voltage (V)</th><th>PWM (%)</th><th>Speed (RPM) (REF)</th></tr><tr><td>0</td><td>0</td><td>0</td></tr><tr><td>1.5</td><td>15</td><td>320±50RPM</td></tr><tr><td>6.0</td><td>60</td><td>1220±8%</td></tr><tr><td>9.5</td><td>95</td><td>1845±5%</td></tr></table>		Voltage (V)	PWM (%)	Speed (RPM) (REF)	0	0	0	1.5	15	320±50RPM	6.0	60	1220±8%	9.5	95	1845±5%
Voltage (V)	PWM (%)	Speed (RPM) (REF)															
0	0	0															
1.5	15	320±50RPM															
6.0	60	1220±8%															
9.5	95	1845±5%															
Current control	The speed comparison will control level <table><tr><th>Current (mA)</th><th>Speed (RPM) (REF)</th></tr><tr><td>4.0</td><td>0</td></tr><tr><td>6.3</td><td>320±50RPM</td></tr><tr><td>14.0</td><td>1240±8%</td></tr><tr><td>19.5</td><td>1845±5%</td></tr></table>		Current (mA)	Speed (RPM) (REF)	4.0	0	6.3	320±50RPM	14.0	1240±8%	19.5	1845±5%					
Current (mA)	Speed (RPM) (REF)																
4.0	0																
6.3	320±50RPM																
14.0	1240±8%																
19.5	1845±5%																
Alarm state	NO and COM will OPEN ; NC and COM will CLOSE.																
FG	$V_{CE(sat)} = 0.7V \text{ MAX.}$ $I_C = 5mA \text{ MAX.}$ $V_{FG} = 30.0V \text{ MAX.}$ $R \geq V_{FG} / I_C$ Frequency generator waveform  $N=R.P.M$ $TS=60/N(SEC)$ 1 PULSE PER REVOLUTION $T1=T2=1/2 TS$																

Control Voltage VS. RPM Curve

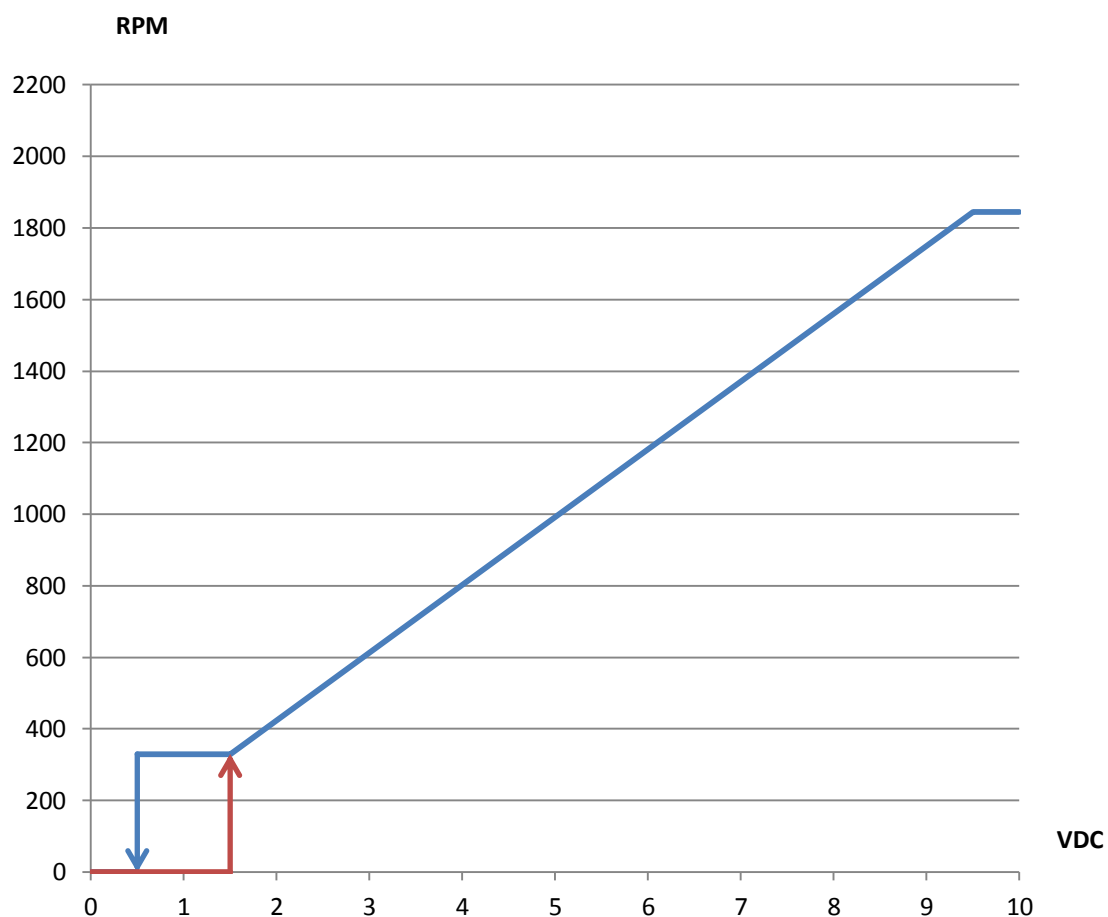

Voltage(VDC) , PWM duty (%), 4~20mA table

Voltage	0	0.5	1	1.5	2	3	4	5	6	7	8	9	10	VDC
PWM duty	0	5	10	15	20	30	40	50	60	70	80	90	100	%
4~20 mA	4	5	5.6	6	7.2	8.8	10.4	12	13.6	15.2	16.8	19	20	mA