


SPECIFICATION FOR APPROVAL



TO: _____


PART NO.		REV.		DELTA SAMPLE ISSUE NO	
PART NAME	EMI FILTER			DELTA MODEL	01MK2
ORDER P/N.	01MK2			SAMPLE ISSUE DATE	

1. PHYSICAL DIMENSIONS:

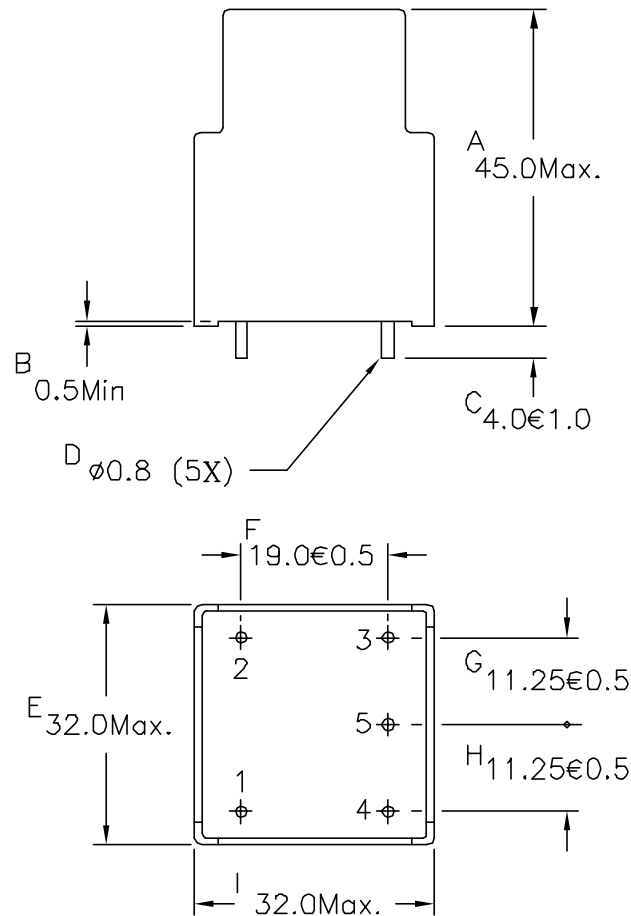

UNIT: mm

2. SCHEMATIC:

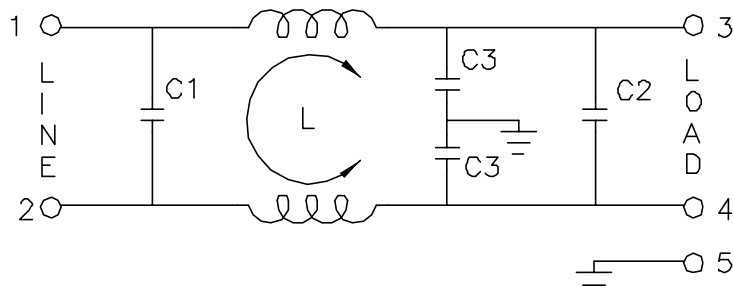

L: 27mH
C1: 0.33uF
C2: 0.1uF
C3: 3300pF

REPORT BY	CHECKED BY	APPROVED BY	UNLESS OTHERWISE SPECIFIED DIMENSION TOLERANCE DCEIMALS .X± .XX± ANGLES±		
			REV.	03/01'02	

DELTA ELECTRONICS, INC.

186 RUEY KUANG ROAD, NEIHU. TAIPEI 114,
TAIWAN, R.O.C.
TEL:886-2-87972088 FAX:886-2-87972120

SPECIFICATION FOR APPROVAL



TO: _____

PART NO.		REV.		DELTA SAMPLE ISSUE NO	
PART NAME	EMI FILTER			DELTA MODEL	01MK2
ORDER P/N.	01MK2			SAMPLE ISSUE DATE	

3. ELECTRICAL CHARACTERISTICS:

3-1. VOLTAGE RATING 115/250VAC

3-2. CURRENT RATING

A. AT 115VAC 1 A RMS Max.

B. AT 250VAC 1 A RMS Max.

3-3. OPERATING FREQUENCY..... 50/60 Hz

3-4. LEAKAGE CURRENT: EACH LINE TO GROUND

A. @115VAC 60Hz 0.25 mA Max.

B. @250VAC 50Hz 0.45 mA Max.

3-5. HIPOT RATING (FOR ONE MINUTE)

A. LINE TO GROUND 2250VDC

B. LINE TO LINE 1450VDC

3-6. TEMPERATURE RANGE: -25 TO +85 DEGREE C

3-7. MINIMUM INSERTION LOSS IN dB: (AT 50 OHM SYSTEM)

FREQ. MHz	.01	.05	.10	.15	.50	1.0	5.0	10	30
COM. MODE dB	/	/	/	45	45	40	40	40	33
DIF. MODE dB	/	/	/	40	45	40	40	42	31

3-8. SAFETY



REPORT BY	CHECKED BY	APPROVED BY	3	
			2	
			REV.1	99.11.01

DELTA ELECTRONICS, INC.

186 RUEY KUANG ROAD, NEIHU. TAIPEI 114,
TAIWAN, R.O.C.
TEL:886-2-87972088 FAX:886-2-87972120