



Specification For Approval

Customer : _____
Description : _____ EC FAN _____
Customer Part No. : _____ Rev : _____
Delta Model No. : _____ GTB056NUT37R N1 _____ Rev : 04
Safety Model No. : _____ GTB056NUT37 _____
Sample Issue No. : _____
Sample Issue Date : _____ 03/06/2020 _____

Please send one copy of this specification back after
you signed approval for production pre-arrangement

Approved by : _____

Date : _____

Delta Electronics, Inc.

No.252, Shangying Road, Guishan Industrial Zone,
Taoyuan City, 33341, Taiwan

TEL : +886-3-359-1968

FAX : +886-3-359-1991

Electronically Commutated (EC) Fan

Centrifugal Fan

φ 566 x 364 mm



DELTA ELECTRONICS, INC.
 No.252, Shangying Road, Guishan
 Industrial Zone, Taoyuan City, 33341,
 Taiwan
 TEL: +886-3-359-1968
 FAX: +886-3-359-1991
www.deltaww.com




Technical features

Input Side	
Nominal Voltage	3~ 400Vac 50/60Hz
Input Source	3~ 380Vac - 480Vac
Power @ Free air	2392 W
Power @ Max. load	3100 W
Output Side	
Speed (RPM)	1550
Qmax. (CMH / CFM)	15063 / 8861
Pmax. (Pa / inAq)	1020 / 4.09
Noise (dB-A) @ Qmax.	85.5
Functions	
Active power factor correction	
Control input 0-10VDC / PWM / 4-20mA.	
Output +10VDC (±10%), max. 10mA.	
Control voltage output: 0-10VDC.	
RS485 control bus	
Alarm relay, Locked rotor protection, Soft start.	
Speed telling, Frequency generator signal.	
Voltage / Current monitoring.	

Physical	
Rotation Direction	CW, Seen on rotor
Material (Impeller / Frame)	Aluminum sheet / Die-cast aluminum
Bearing system	Ball bearings
Weight (kg)	32
Electrical leads	Via terminal block
Environmental	
Operating temperature range	-25 ~ +60 °C
Storage temperature range	-40 ~ +70 °C
Safety	
Safety	UL , cUL
IP Level	IP54
EMC	EN61000-6-2/4 , EN61000-3-2/3 (in progress)
Protection class	I
Insulation class	F
Leakage current	≤ 3.5 mA
Motor protection	Over temperature protected
Life expectancy	60,000 hrs at 40 °C / 15 ~ 65 %RH

NOTE : Delta reserves the right to change specifications and other product information without prior notice.

P & Q curves

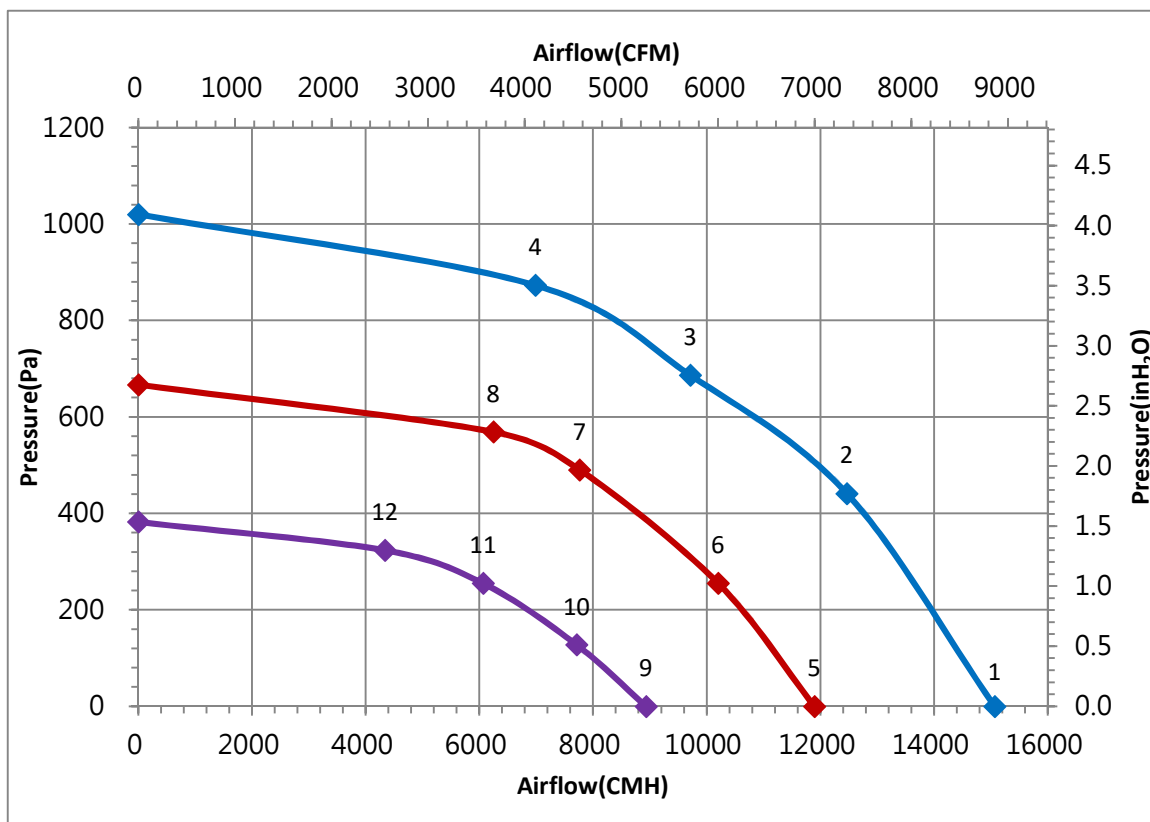

Measure data:


	P [Pa]	Q [CMH]	N [R.P.M.]	P1 [W]	I [A]	Lp [dB(A)]
1	0	15063	1555	2392	3.60	85.5
2	442	12464	1531	3119	4.69	
3	687	9710	1495	3111	4.68	
4	873	6981	1532	3113	4.68	
5	0	11893	1242	1203	1.85	80.0
6	255	10200	1246	1590	2.44	
7	491	7762	1240	1726	2.65	
8	569	6245	1241	1680	2.58	
9	0	8930	930	527	0.83	72.5
10	128	7712	927	650	1.02	
11	255	6066	928	734	1.15	
12	324	4339	929	693	1.09	

Test Condition :


- Input Voltage: Nominal Voltage
- Temperature : Room Temperature
- Humidity : 65%RH
- Measured with inlet cone.
- Noise (Lp) is measured at a distance of one meter from the inlet side.

Dimension drawing

Label :

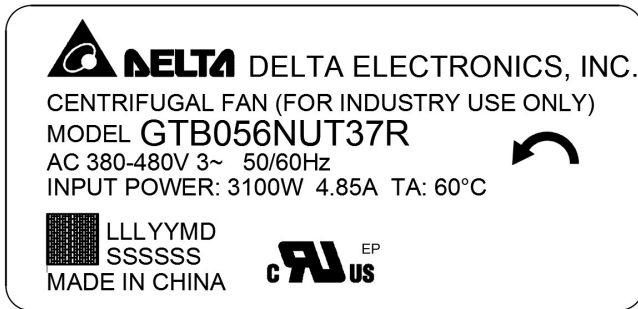

Fan :

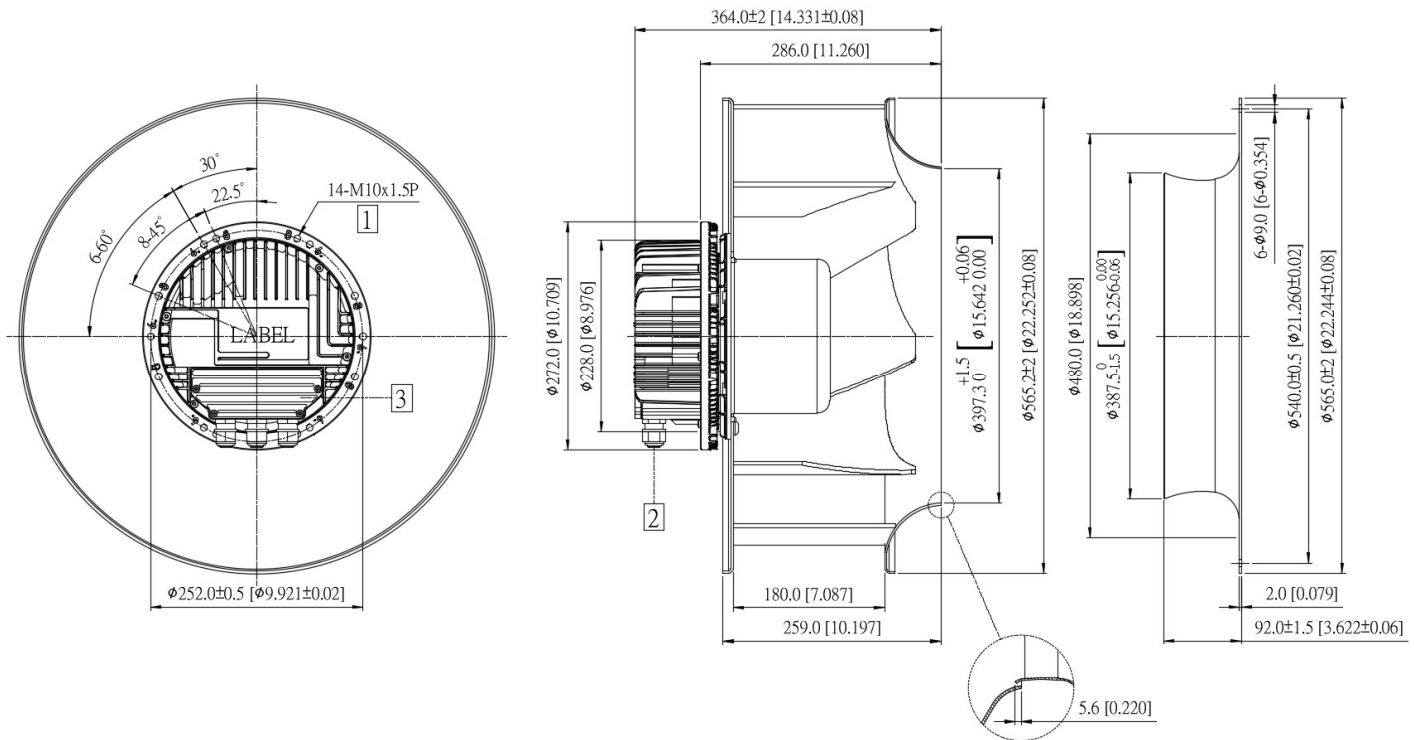


Note :

- 1 Depth of screw : 25mm max..
- 2 Cable diameter : $\phi 7.0 \sim \phi 12.7$ mm.
- 3 Open the cover and refer to definition of terminal block.


UNIT : mm[INCH]






Definition of terminal block

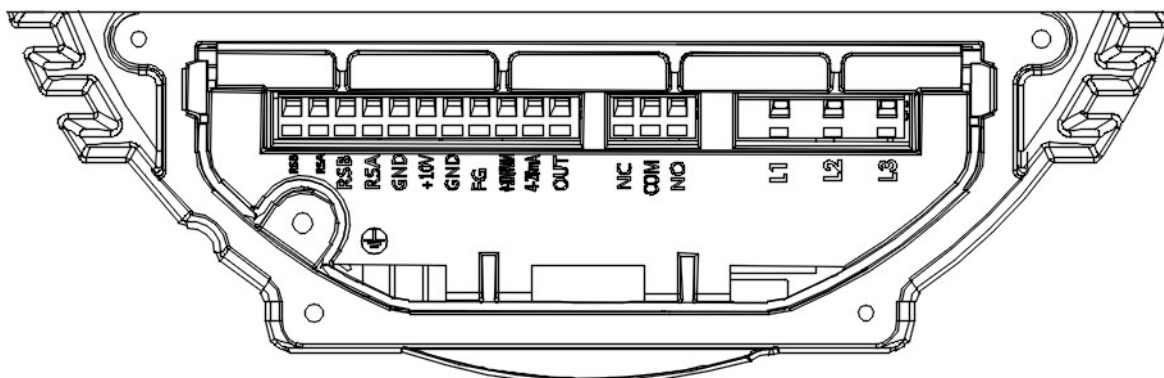


	Text	Functions
Power	L1	AC main (3~ 380-480VAC)
	L2	AC main (3~ 380-480VAC)
	L3	AC main (3~ 380-480VAC)
Status	NC	Alarm relay, open by failure
	COM	Alarm relay, common (2A/250VAC)
	NO	Alarm relay, close by failure
Signal	RSB	RS485-B
	RSA	RS485-A
	RSB	RS485-B
	RSA	RS485-A
	GND	Ground
	+10V	+10V output, MAX 10mA (For external potentiometer)
	GND	Ground
	FG	Frequency generator (FG) signal
	0-10V/PWM	Speed control, input 0-10VDC
	4-20mA	Speed control, input 4-20mA
	OUT	Control voltage output 0-10VDC (For external potentiometer)


Lead wire connection:

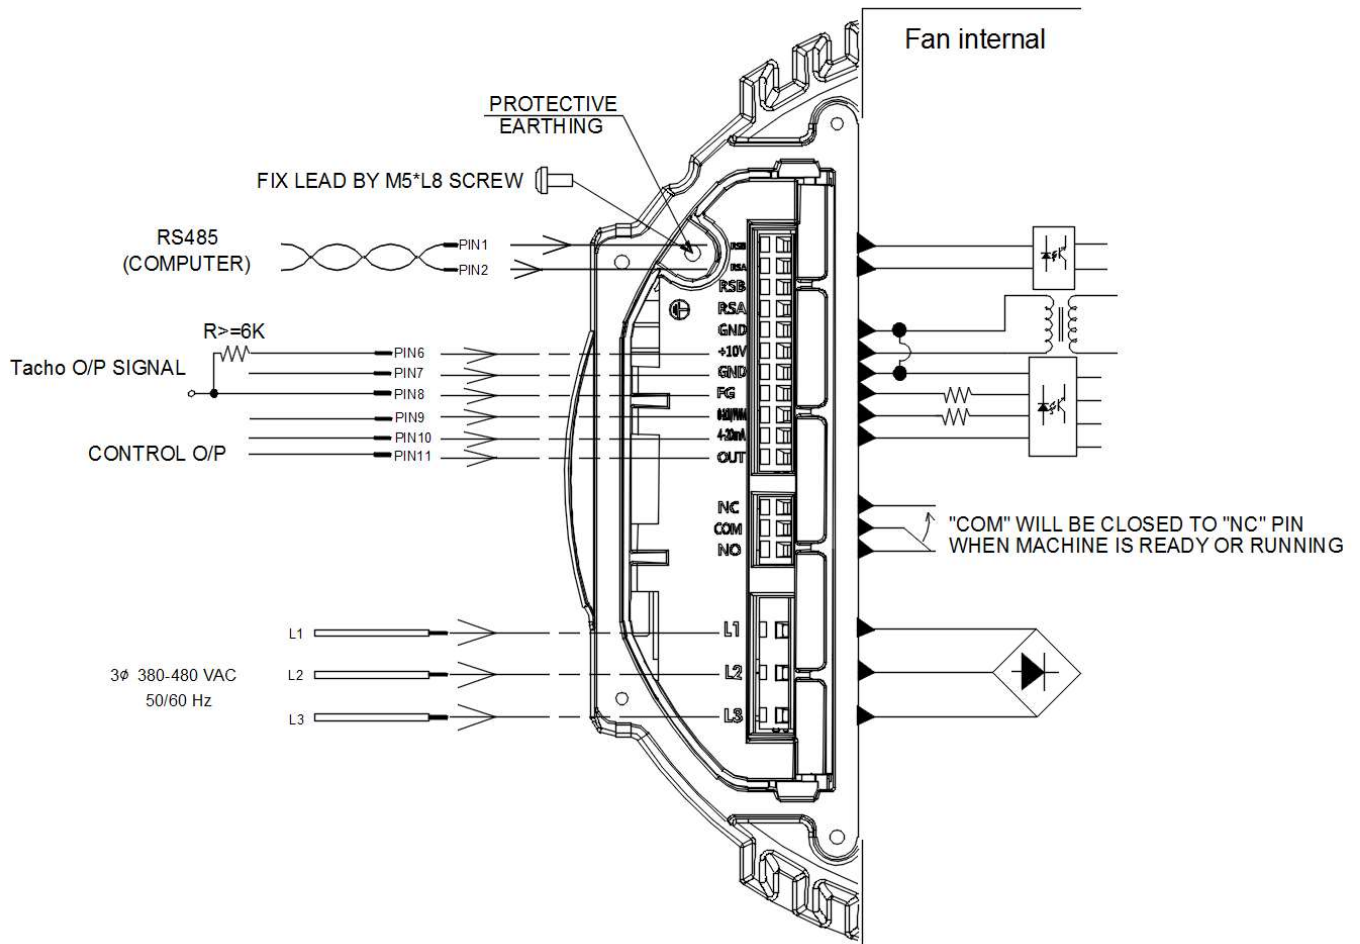

Speed setting	
Full Speed 	Short PIN6 & PIN9 Fan will run full speed.
	Connector 1-10kΩ variable resistor Between +10VDC with GND and 0-10V/PWM Turn the variable resistor · can change the ' 0-10V/PWM ' voltage (0...10V) °
Voltage Control B 0-10V DC Source 	Use voltage source support 0~10VDC voltage DC+ : connector PIN9(+) DC - : connector PIN7(-)
PWM Control PWM Generator 	PWM duty control PWM amplitude is 10VDC(+ -5%) Frequency Range is 100Hz...100kHz -PWM duty higher than 15%, fan start up ° -PWM duty lower than 5%, fan stop °
Current Control 4-20mA Current Source 	4~20mA Current Control Open 0-10V/PWM PIN - 4.5 mA → Fan Stop - 6.0 mA → Fan Start up - 19.5 mA → Maximum Speed

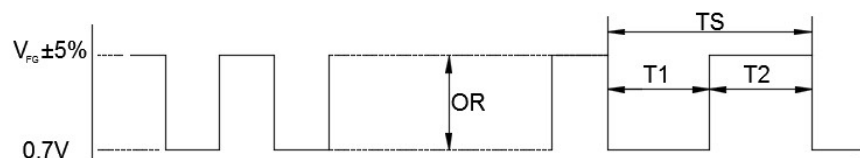Signal function			
RS485 control function	RS485 control function -Select the control mode of speed, fixed speed or fixed PWM duty -Speed and power consumption feedback. -Allow multiple FANs control and status patrol.		
Control O/P	The analog signal level is the derivative of current control level at Nominal Voltage		
	Current (mA)	Control O/P (VDC) (REF)	
	4.0	0	
	6.3	1.60	
	14.0	6.03	
	19.5	9.19	
Voltage/PWM control	The speed comparison will control level at Nominal Voltage		
	Voltage (V)	PWM (%)	Speed (RPM)
	0	0	0
	1.5	15	100 ± 50 RPM
	6.0	60	967 ± 8%
	9.0	90	1550 ± 5%
Current control	The speed comparison will control level at Nominal Voltage		
	Current (mA)	Speed (RPM)	
	4.0	0	
	6.0	100 ± 50 RPM	
	14.0	967 ± 8%	
	19.0	1550 ± 5%	
Alarm state	NC and COM will OPEN; NO and COM will CLOSE.		
FG	$V_{CE(sat)} = 0.7V \text{ MAX.}$ $V_{FG} = 30.0V \text{ MAX.}$ $I_C = 5mA \text{ MAX.}$ $R \geq V_{FG} / I_C$ Frequency generator waveform  $N=R.P.M$ $TS=60/N(SEC)$ 1 PULSE PER REVOLUTION $T1=T2=1/2 TS$		

Control Voltage VS. RPM Curve at Nominal Voltage

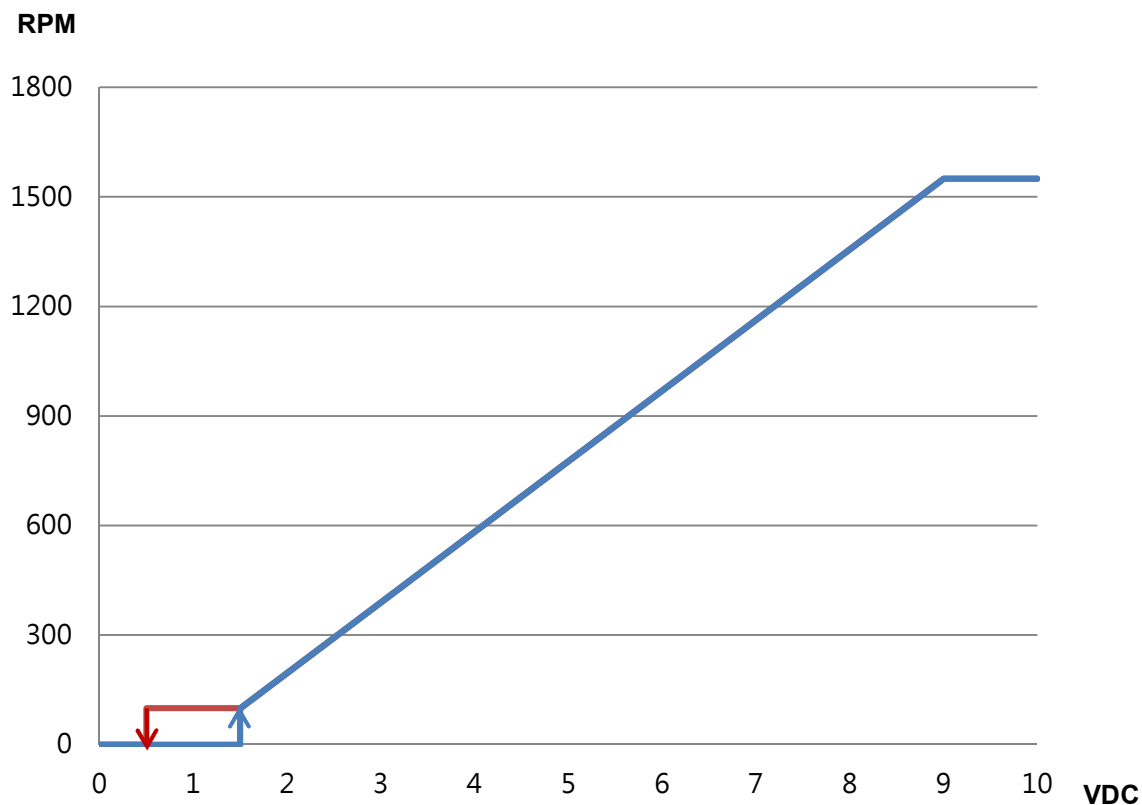

Voltage(VDC) , PWM duty (%), 4~20mA table

Voltage	0	0.5	1	1.5	2	3	4	5	6	7	8	9	10	VDC
PWM duty	0	5	10	15	20	30	40	50	60	70	80	90	100	%
4~20 mA	4	5	5.6	6	7.2	8.8	10.4	12	13.6	15.2	16.8	19	20	mA