



Specification For Approval

Customer : _____
Description : _____ EC FAN _____
Customer Part No. : _____ Rev : _____
Delta Model No. : _____ GTB040FUC20R N1 _____ Rev : 06
Safety Model No. : _____ GTB040FUC20 _____
Sample Issue No. : _____
Sample Issue Date : _____ 08/28/2018 _____

Please send one copy of this specification back after
you signed approval for production pre-arrangement

Approved by : _____

Date : _____

Delta Electronics, Inc.

No.252, Shangying Road, Guishan Industrial Zone,
Taoyuan City, 33341, Taiwan

TEL : +886-3-359-1968

FAX : +886-3-359-1991

Electronically Commutated (EC) Fan

Centrifugal Fan

φ 404 x 202.7mm



DELTA ELECTRONICS, INC.
No.252, Shangying Road, Guishan
Industrial Zone, Taoyuan City, 33341,
Taiwan
TEL: +886-3-359-1968
FAX: +886-3-359-1991
www.deltaww.com




Technical features

Input Side	
Nominal Voltage	1~ 230Vac 50/60Hz
Input Source	1~ 200Vac - 277Vac
Power @ Free air	244 W
Power @ Max. load	430 W
Output Side	
Speed (RPM)	1600
Qmax. (CMH / CFM)	3155 / 1857
Pmax. (Pa / inAq)	563 / 2.26
Noise (dB-A) @ Qmax.	74.0
Functions	
Passive power factor correction	
Control input 0-10VDC / PWM	
Output +10VDC (±10%), max. 10mA.	
RS485 control bus	
Alarm relay, Locked rotor protection, Soft start.	
Voltage / Current monitoring.	

Physical	
Rotation Direction	CW, Seen on rotor
Material (Impeller / Frame)	Aluminum sheet / Die-cast aluminum
Bearing system	Ball bearings
Weight (kg)	7.1
Electrical leads	Lead wire
Environmental	
Operating temperature range	-25 ~ +60 °C
Storage temperature range	-40 ~ +70 °C
Safety	
Safety	UL , cUL , TUV
IP Level	IP54
EMC	EN61000-6-1/3 , EN61000-3-2/3
Protection class	I
Insulation class	B
Leakage current	≤ 3.5 mA
Motor protection	Over temperature protected
Life expectance	60,000 hrs at 40 °C / 15 ~ 65 %RH

NOTE : Delta reserves the right to change specifications and other product information without prior notice.

P & Q curves

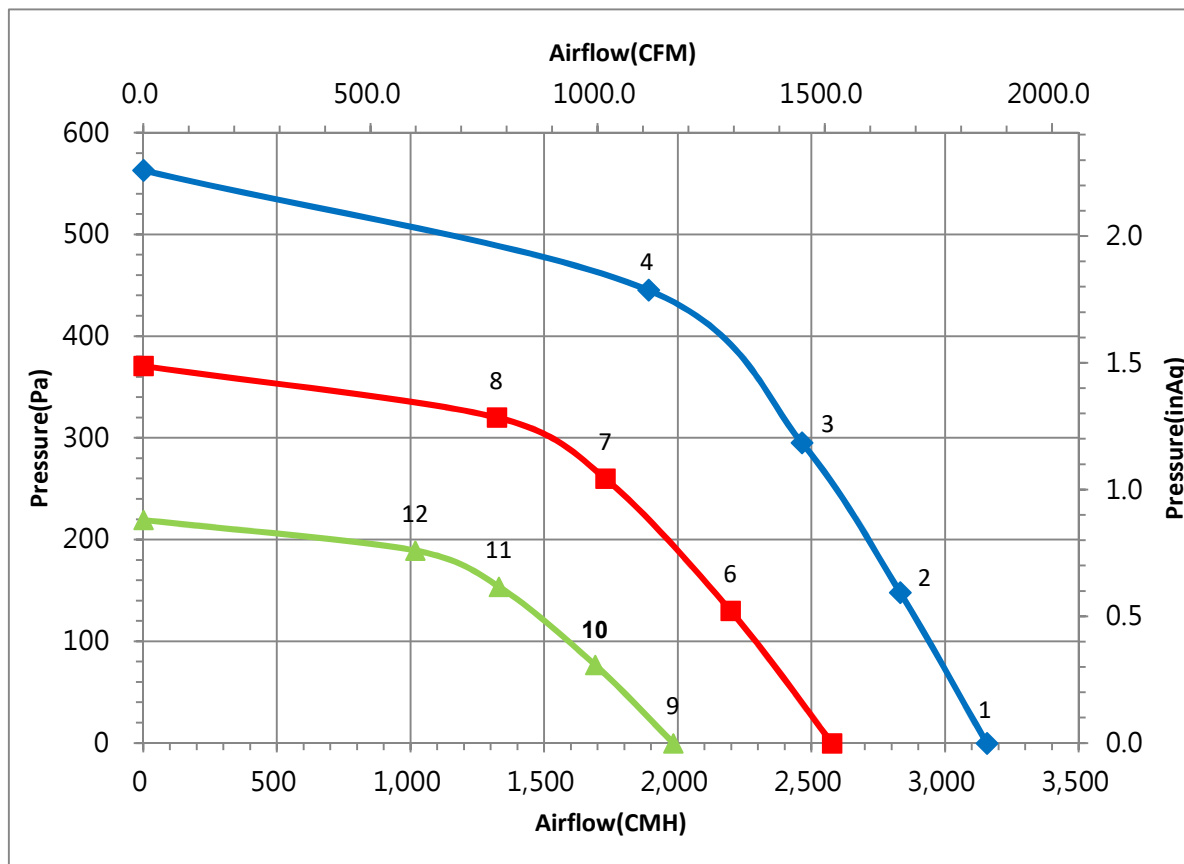

Measure data:


	P [Pa]	Q [CMH]	N [R.P.M.]	P1 [W]	I [A]	Lp [dB(A)]
1	0	3156	1592	232	1.44	74.0
2	148	2832	1599	316	1.97	
3	295	2464	1600	381	2.37	
4	445	1890	1600	414	2.58	
5	0	2577	1300	126	0.81	70.0
6	130	2197	1300	182	1.17	
7	260	1729	1300	220	1.41	
8	320	1322	1300	219	1.40	
9	0	1983	1000	57	0.42	64.0
10	77	1690	1000	83	0.60	
11	154	1330	1000	100	0.73	
12	189	1017	1000	100	0.72	

Test Condition :


- Input Voltage: Nominal Voltage
- Temperature : Room Temperature
- Humidity : 65%RH
- Measured with inlet cone.
- Noise (Lp) is measured at a distance of one meter from the inlet side.
- Testing method is compliance with ISO 3745.

Dimension drawing

Label :

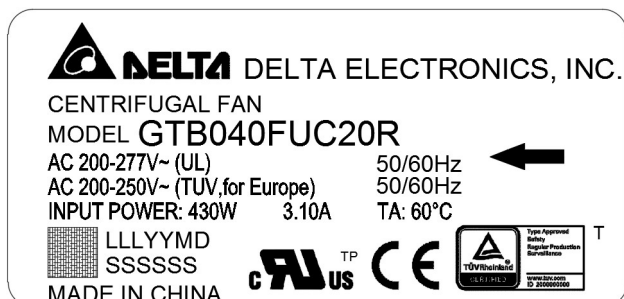

Fan :

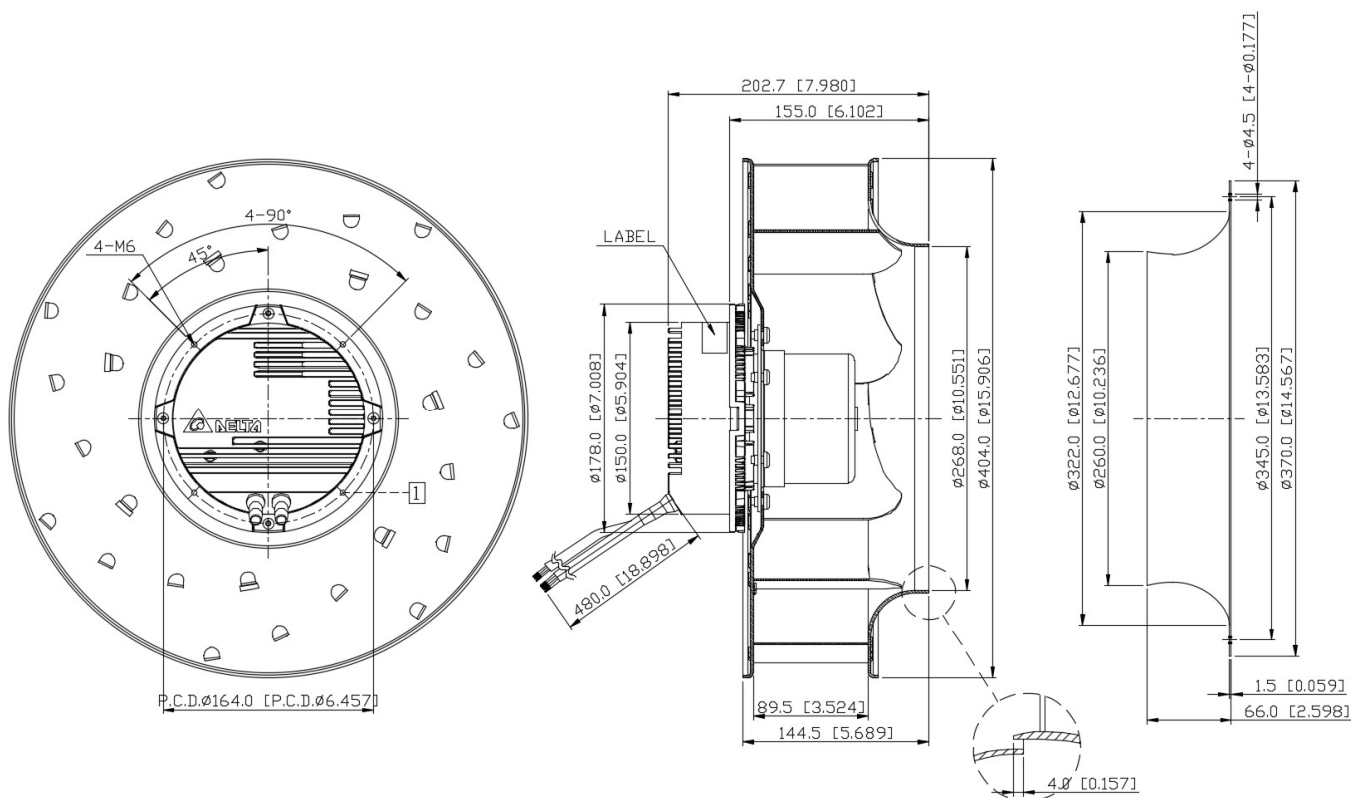


Note :

- 1 Depth of screw : 6~8mm.


UNIT : mm[INCH]



Definition of cable

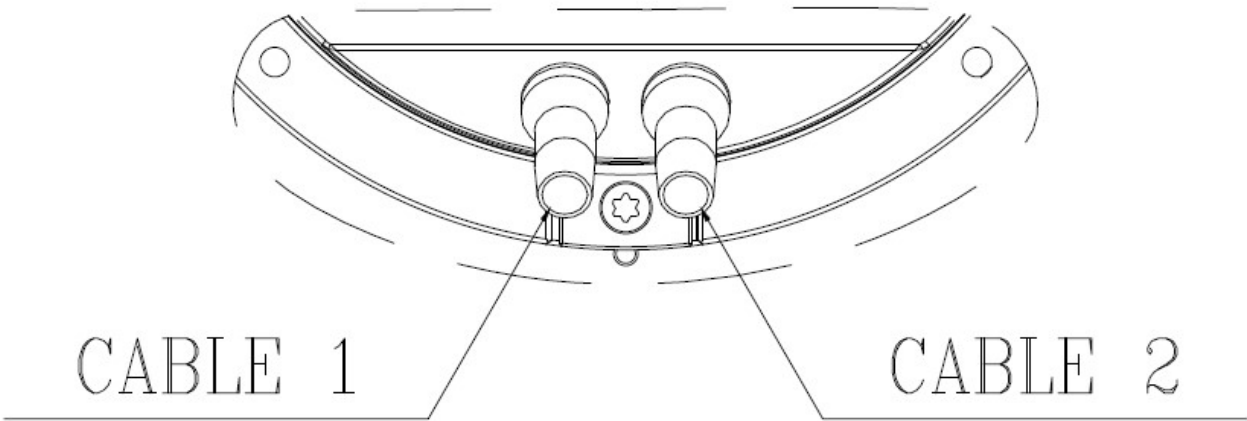

Cable	Wire type	Text	Functions
1	UL 2464 18AWG 3C	Brown	L
		Blue	N
		Green / Yellow	Earth
2	UL 2464 24AWG 7C	Red / Pink	+10V
		Blue / White	PWM
		Black	GND
		Green / Red	RS485-
		Green / White	RS485+
		Pink / Black	Relay 1
		Green / Black	Relay 2


Lead wire connection:

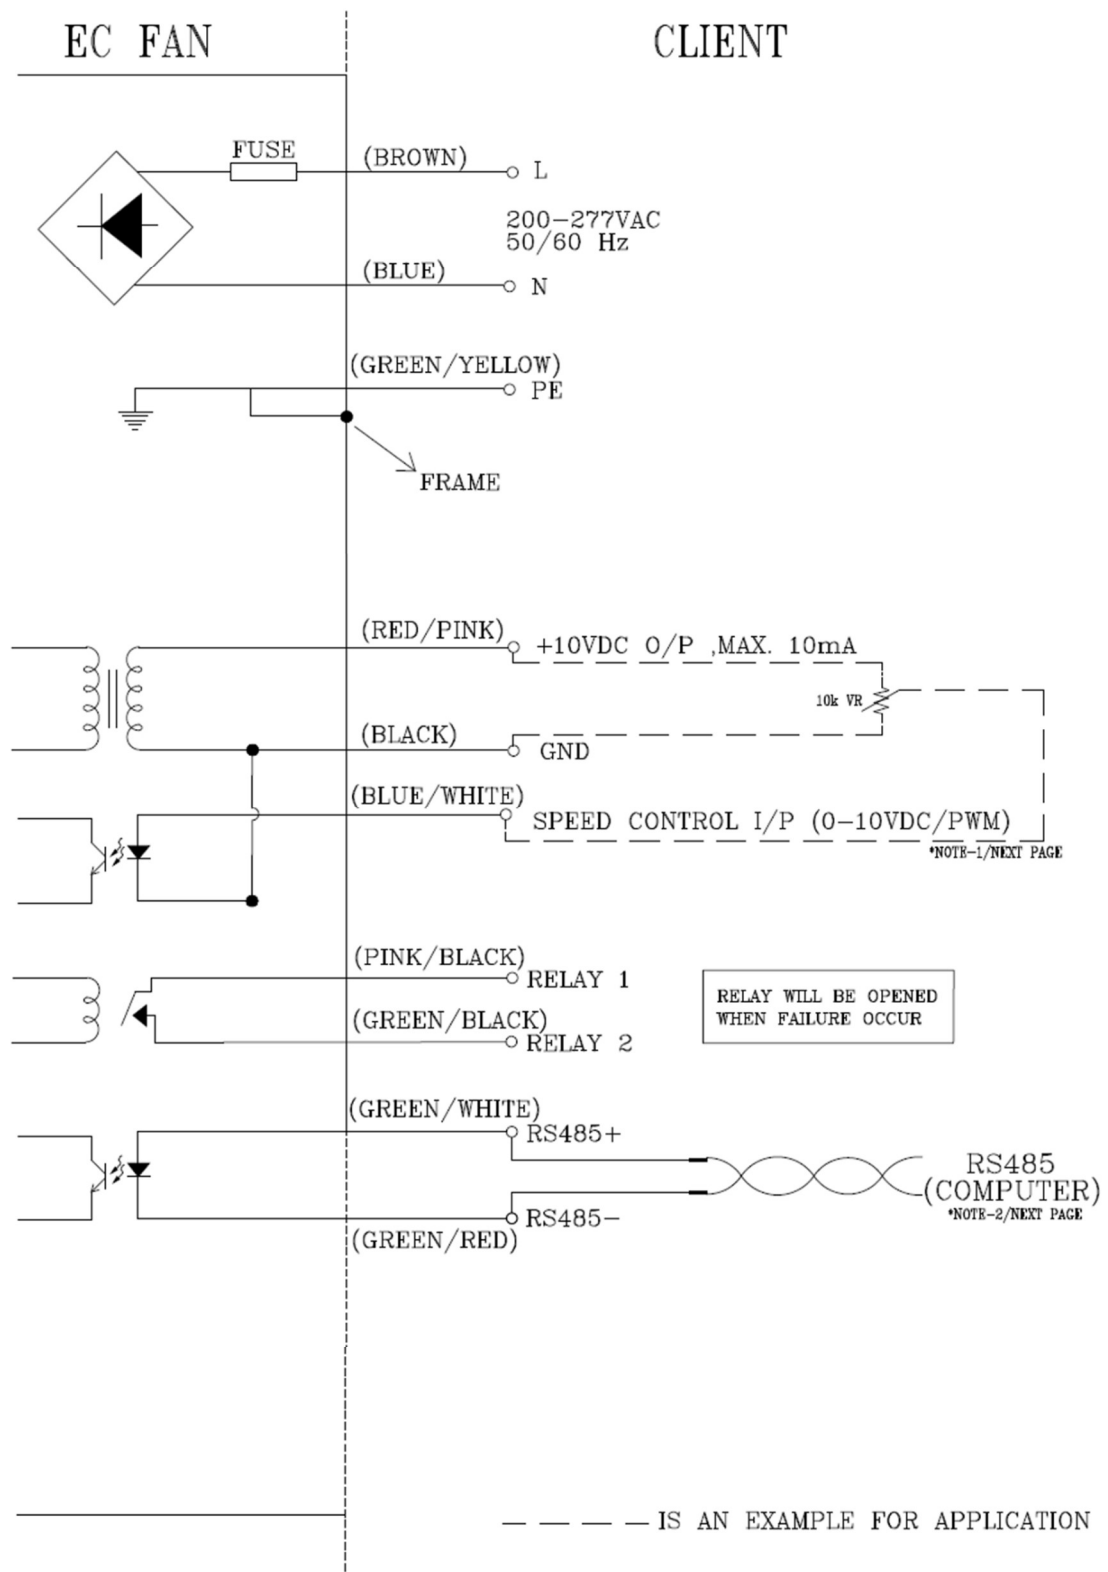

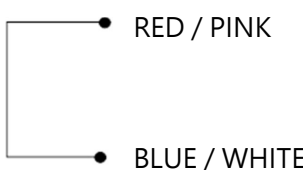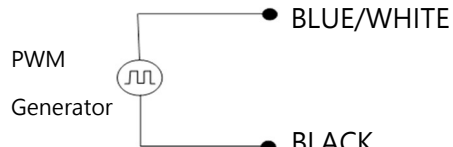Speed setting	
Full Speed 	Short RED / PINK & BLUE / WHITE Fan will run full speed.
Voltage Control 	Use voltage source support 0~10VDC voltage DC+ : connect to BLUE / WHITE DC - : connect to BLACK -Voltage higher than 1.5 VDC, fan start up. -Voltage lower than 0.5 VDC , fan stop
PWM Control 	PWM duty control PWM amplitude is 10VDC(+ -5%) Frequency Range is 100Hz...100kHz -PWM duty higher than 15%, fan start up ° -PWM duty lower than 5%, fan stop °

Signal function												
RS485 control function		RS485 control function -Select the control mode of speed, fixed speed or fixed PWM duty -Speed and power consumption feedback. -Allow multiple FANs control and status patrol.										
Voltage/PWM control		The speed comparison will control level <table><tr><td>Voltage (V)</td><td>PWM (%)</td><td>Speed (RPM) (REF)</td></tr><tr><td>0</td><td>0</td><td>0</td></tr><tr><td>9.5</td><td>95</td><td>1600 ± 5%</td></tr></table>		Voltage (V)	PWM (%)	Speed (RPM) (REF)	0	0	0	9.5	95	1600 ± 5%
Voltage (V)	PWM (%)	Speed (RPM) (REF)										
0	0	0										
9.5	95	1600 ± 5%										
Alarm state		Open with Failure (Relay1/Relay2)										

Control Voltage VS. RPM Curve

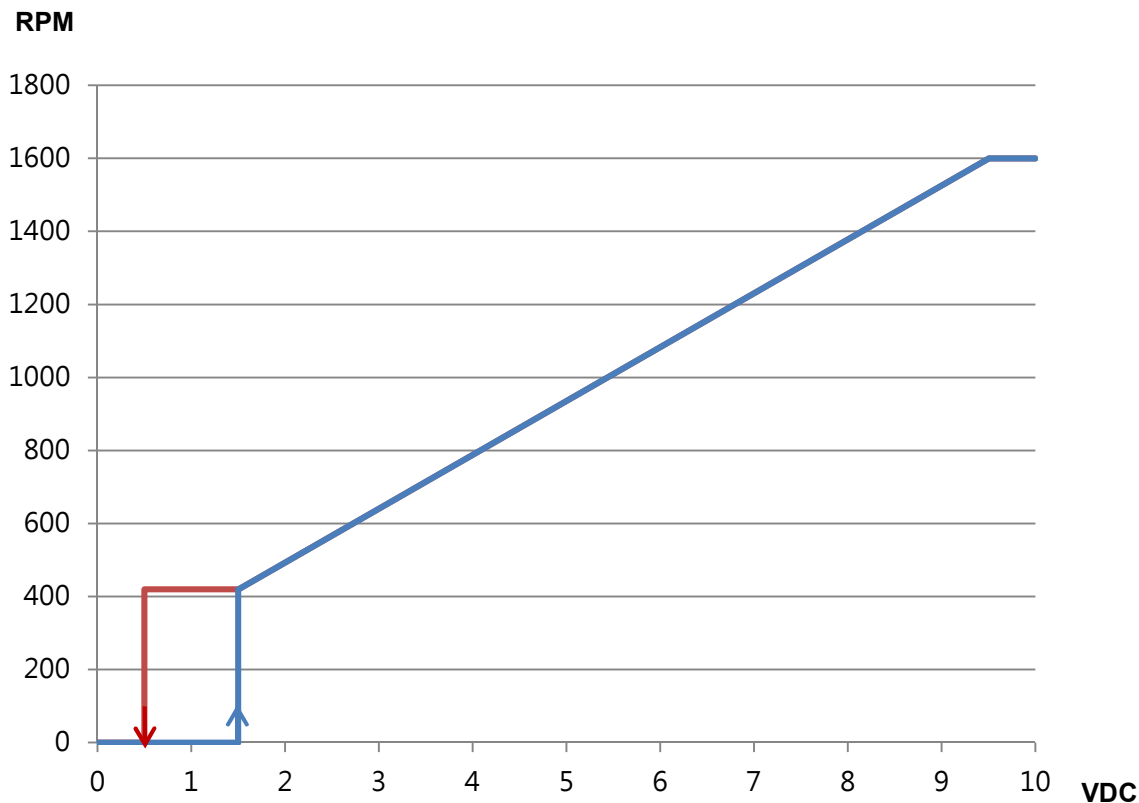

Voltage(VDC) , PWM duty (%)

Voltage	0	0.5	1	1.5	2	3	4	5	6	7	8	9	10	VDC
PWM duty	0	5	10	15	20	30	40	50	60	70	80	90	100	%