



## Specification For Approval

Customer : \_\_\_\_\_ STD \_\_\_\_\_  
Description : \_\_\_\_\_ EC FAN \_\_\_\_\_  
Customer Part No. : \_\_\_\_\_ Rev : \_\_\_\_\_  
Delta Model No. : \_\_\_\_\_ GTB025FUC19R N1 \_\_\_\_\_ Rev : 05 \_\_\_\_\_  
Safety Model No. : \_\_\_\_\_ GTB025FUC19 \_\_\_\_\_  
Sample Issue No. : \_\_\_\_\_  
Sample Issue Date : \_\_\_\_\_ 03/25/2019 \_\_\_\_\_

Please send one copy of this specification back after  
you signed approval for production pre-arrangement

Approved by : \_\_\_\_\_

Date : \_\_\_\_\_

Delta Electronics, Inc.

No.252, Shangying Road, Guishan Industrial Zone,

Taoyuan City, 33341, Taiwan


TEL : +886-3-359-1968

FAX : +886-3-359-1991

## Electronically Commutated (EC) Fan

### Centrifugal Fan

φ 259 x 194 mm

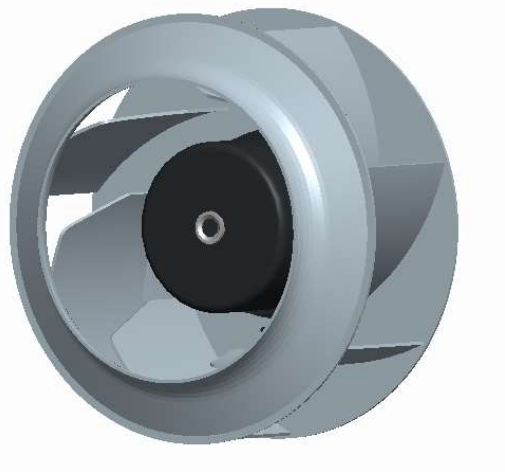

Delta Electronics, Inc.  
 No.252, Shangying Road, Guishan  
 Industrial Zone, Taoyuan City, 33341,  
 Taiwan  
 TEL: +886-3-359-1968  
 FAX: +886-3-359-1991  
[www.deltaww.com](http://www.deltaww.com)




## Technical features

Input Side	
Nominal Voltage	1~ 230Vac 50/60Hz
Input Source	1~ 200Vac - 277Vac
Power @ Free air	415 W
Power @ Max. load	530 W
Output Side	
Speed (RPM)	3050
Qmax. (CMH / CFM)	2600 / 1530
Pmax. (Pa / inAq)	818 / 3.28
Noise (dB-A) @ Qmax.	79.0
Functions	
Passive power factor correction	
Control input 0~10VDC / PWM pattern.	
Output +10V <sub>DC</sub> (±10%), max. 10mA.	
RS485 control bus	
Alarm relay, Locked rotor protection, Soft start.	
Voltage / Current monitoring.	

Physical	
Rotation Direction	CW, Seen on rotor
Material (Impeller / Frame)	Aluminum sheet / Die-cast aluminum
Bearing system	Ball bearings
Weight (kg)	5.3
Electrical leads	Lead wire
Environmental	
Operating temperature range	-25 ~ +60 °C
Storage temperature range	-40 ~ +70 °C
Safety	
Safety	UL, cUL, TUV
IP Level	IP54
EMC	EN61000-6-1/3 , EN61000-3-2/3
Protection class	I
Insulation class	B
Leakage current	<= 3.5 mA
Motor protection	Over temperature protected
Life expectancy	60,000 hrs at 40 °C / 15 ~ 65 %RH

NOTE : Delta reserves the right to change specifications and other product information without prior notice.

P & Q curves

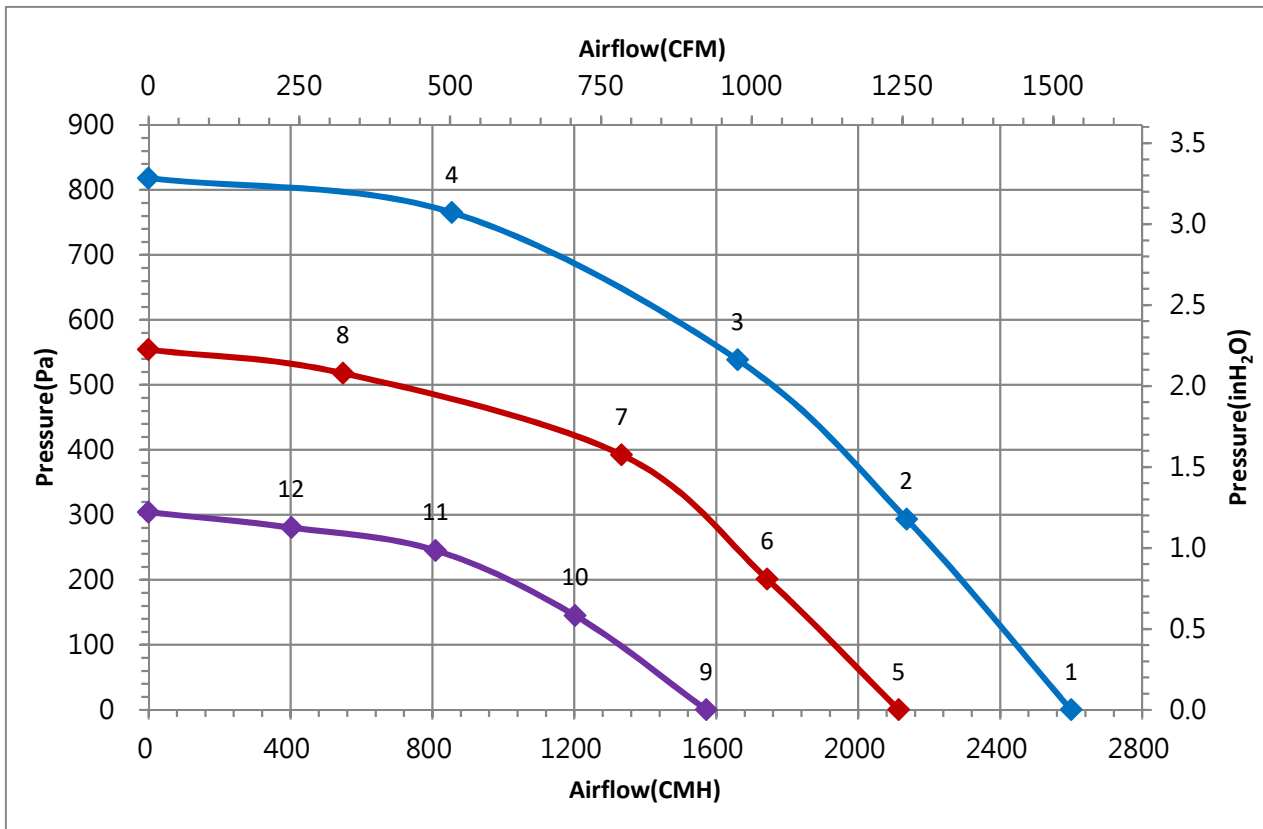

Measure data:

	P [Pa]	Q [CMH]	N [R.P.M.]	P1 [W]	I [A]	Lp [dB(A)]
1	0	2600	3051	415	2.68	79.0
2	293	2136	3046	480	3.09	
3	539	1660	3007	497	3.22	
4	765	855	3048	421	2.72	
5	0	2114	2506	221	1.49	72.2
6	201	1744	2504	266	1.77	
7	392	1333	2497	287	1.9	
8	518	548	2501	214	1.45	
9	0	1572	1843	95	0.69	68.3
10	145	1202	1838	117	0.83	
11	245	809	1840	118	0.84	
12	281	403	1842	93	0.68	

Test Condition :


- Input Voltage: Nominal Voltage
- Temperature : Room Temperature
- Humidity : 65%RH
- Measured with inlet cone.
- Noise (Lp) is measured at a distance of one meter from the inlet side.

Dimension drawing

Label :



Fan :

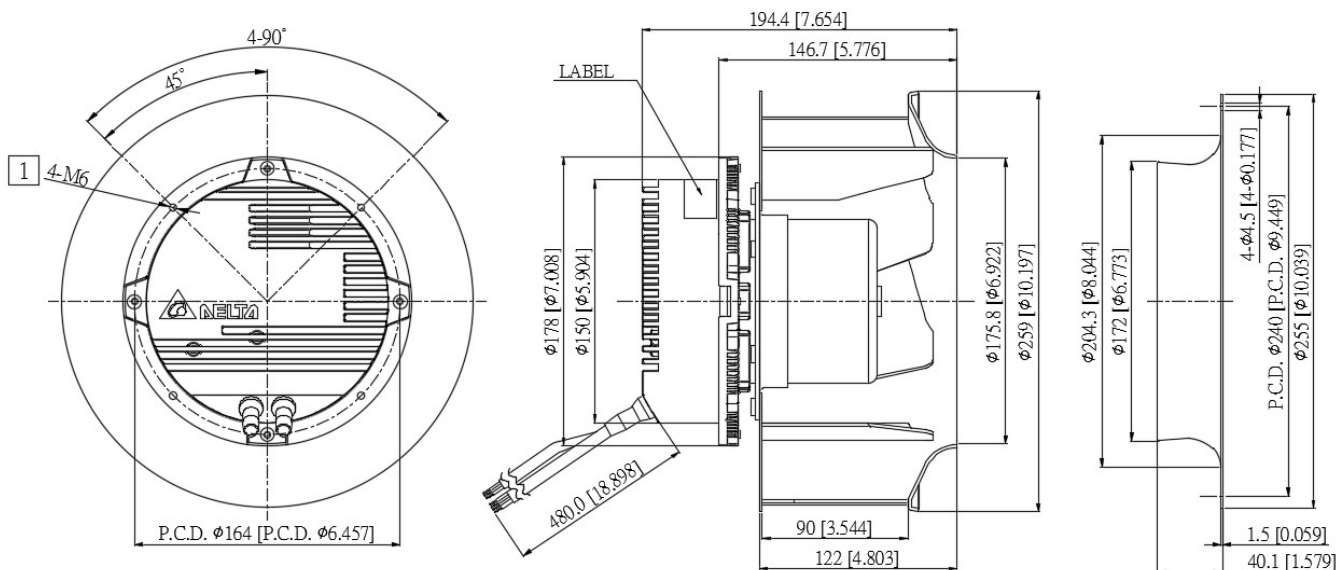


Note :

1. Depth of screw : 6 ~ 8 mm.


UNIT : mm[INCH]




## Definition of terminal block

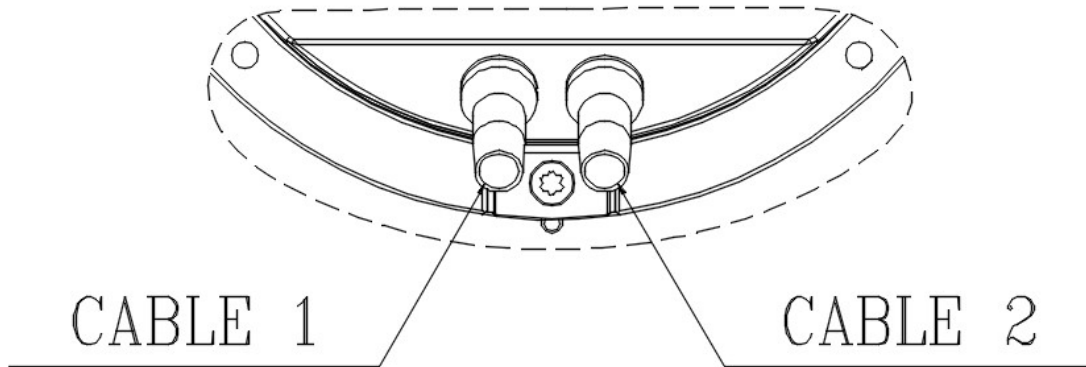

Cable	Wire type	Text	Functions
1	UL 2464 18AWG 3C TS -LF-	Brown	L
		Blue	N
		Green / Yellow	Earth
2	UL 2464 24AWG 7C	Red / Pink	+10V
		Blue / White	PWM
		Black	GND
		Green / Red	RS485-
		Green / White	RS485+
		Pink / Black	Relay 1
		Green / Black	Relay 2

Lead wire connection:

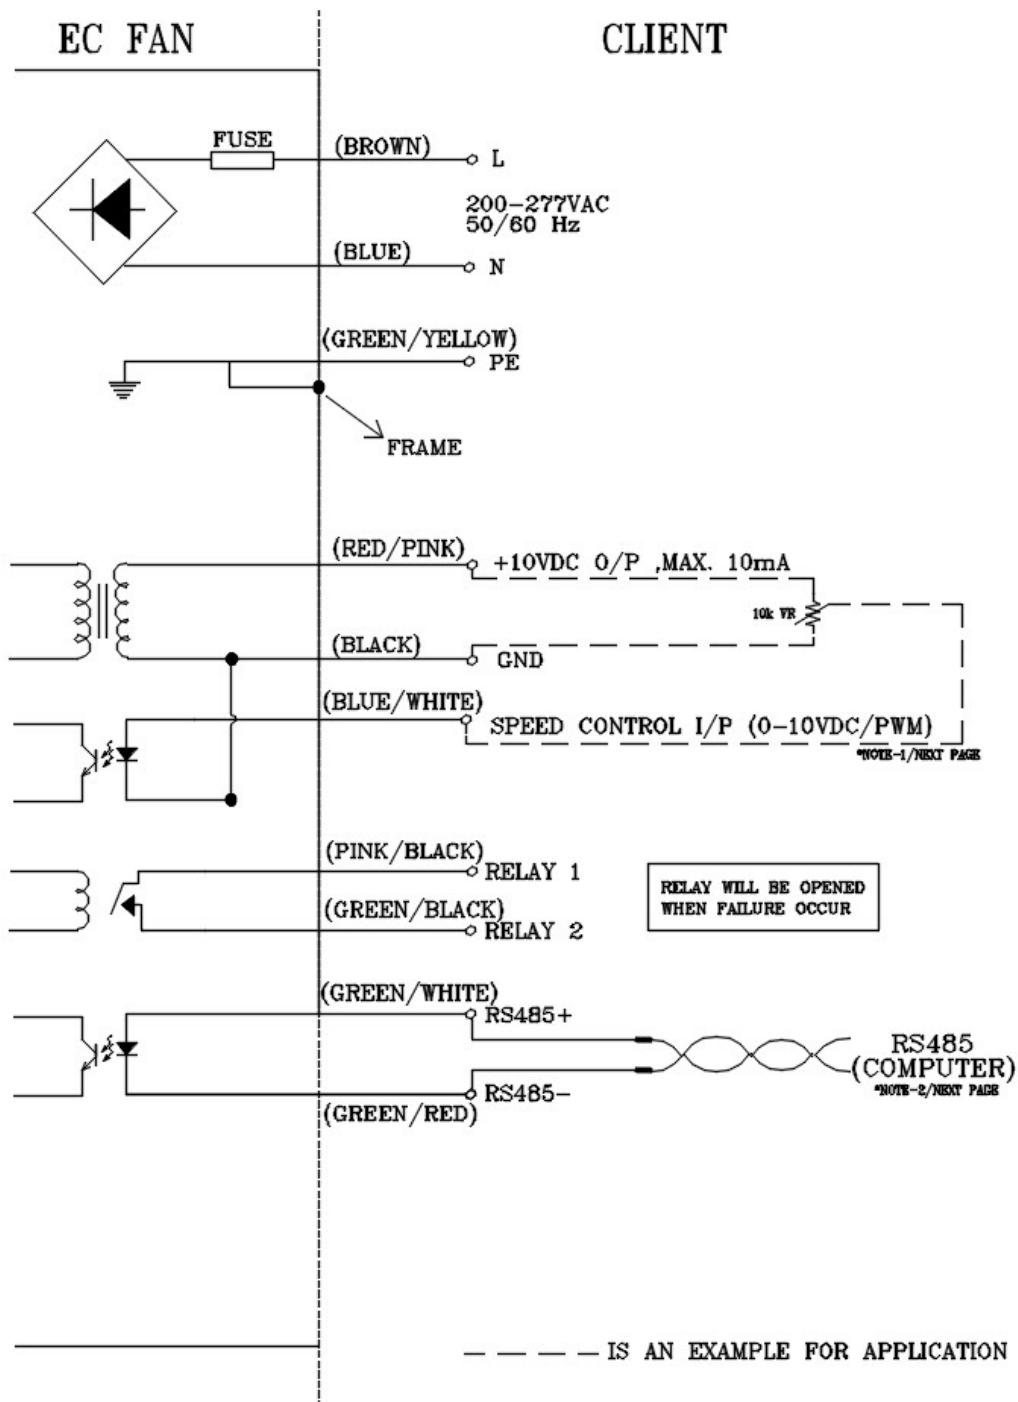


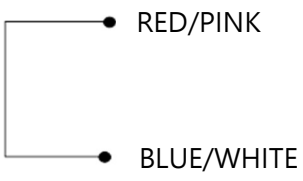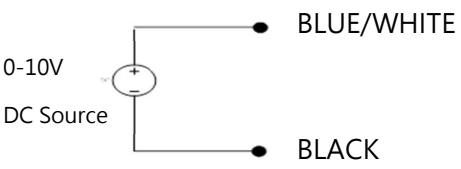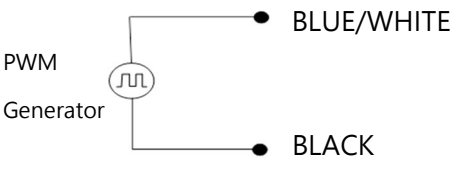Speed setting	
<p><b>Full Speed</b></p> 	<p><b>Short RED/PINK &amp; BLUE/WHITE</b> Fan will run full speed.</p>
<p><b>Voltage Control</b></p> 	<p><b>Use voltage source support 0~10VDC voltage</b> DC+ : connector BLUE/WHITE DC - : connector BLACK -Voltage higher than 1.5VDC, fan start up. -Voltage lower than 0.5VDC , fan stop</p>
<p><b>PWM Control</b></p> 	<p><b>PWM duty control</b> PWM amplitude is 10VDC(±5%) Frequency Range is 100Hz ~ 100kHz -PWM duty higher than 15%, fan start up ° -PWM duty lower than 5%, fan stop °</p>

Signal function										
<p><b>RS485 control function</b></p>	<p><b>RS485 control function</b> -Select the control mode of speed, fixed speed or fixed PWM duty -Speed and power consumption feedback. -Allow multiple FANs control and status patrol.</p>									
<p><b>Voltage control</b></p>	<p>The speed comparison will control level</p> <table border="1" data-bbox="590 1556 1284 1702"> <thead> <tr> <th>Voltage (V)</th> <th>PWM (%)</th> <th>Speed (RPM) (REF)</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0</td> <td>0</td> </tr> <tr> <td>9.5</td> <td>95</td> <td>3050</td> </tr> </tbody> </table>	Voltage (V)	PWM (%)	Speed (RPM) (REF)	0	0	0	9.5	95	3050
Voltage (V)	PWM (%)	Speed (RPM) (REF)								
0	0	0								
9.5	95	3050								
<p><b>Alarm state</b></p>	<p><b>Relay 1 and Relay 2 Will be Open with Failure.</b></p>									

## Control Voltage VS. RPM Curve

Voltage(V)	PWM Duty(%)	Speed R.P.M.(ref.)	Power(W)
0.0	0	0	10
9.5	95	3050	530

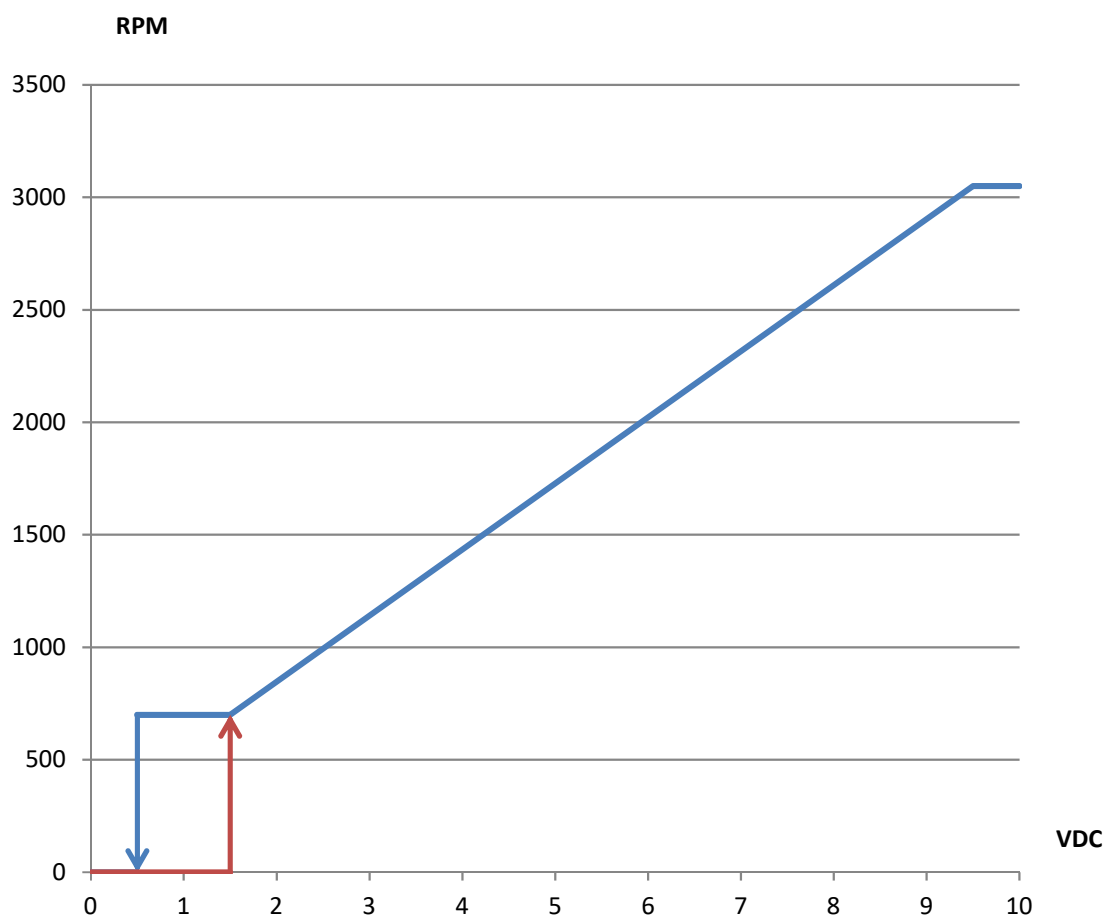

Voltage(VDC) , PWM duty (%)

Voltage	0	0.5	1	1.5	2	3	4	5	6	7	8	9	10	VDC
PWM duty	0	5	10	15	20	30	40	50	60	70	80	90	100	%