



## Specification For Approval

Customer : \_\_\_\_\_  
Description : \_\_\_\_\_ EC FAN \_\_\_\_\_  
Customer Part No. : \_\_\_\_\_ Rev : \_\_\_\_\_  
Delta Model No. : \_\_\_\_\_ GTB040FUC23R N1 \_\_\_\_\_ Rev : 08  
Safety Model No. : \_\_\_\_\_ GTB040FUC23R \_\_\_\_\_  
Sample Issue No. : \_\_\_\_\_  
Sample Issue Date : \_\_\_\_\_ 08/28/2018 \_\_\_\_\_

Please send one copy of this specification back after  
you signed approval for production pre-arrangement

Approved by : \_\_\_\_\_

Date : \_\_\_\_\_

Delta Electronics, Inc.

No.252, Shangying Road, Guishan Industrial Zone,

Taoyuan City, 33341, Taiwan

TEL : +886-3-359-1968

FAX : +886-3-359-1991

\*\*\* SAMPLE HISTORY \*\*\*

CUSTOMER :

CUSTOMER P/N :

DELTA MODEL : GTB040FUC23R N1

REV	DESCRIPTION	DRAWN	CHECKED		APPROVED	ISSUE DATE
			ME	EE		
06	Issue spec.	丁威柏 02/07'18	丁威柏 02/07'18	郭子鳴 02/07'18	顏承偉 02/07'18	02/07'18
07	Change Dimension drawing.	丁威柏 02/21'18	丁威柏 02/21'18	郭子鳴 02/21'18	顏承偉 02/21'18	02/21'18

## Electronically Commutated (EC) Fan

Centrifugal Fan

φ 404 x 228 mm



DELTA ELECTRONICS, INC.  
 No.252, Shangying Road, Guishan  
 Industrial Zone, Taoyuan City, 33341,  
 Taiwan  
 TEL: +886-3-359-1968  
 FAX: +886-3-359-1991  
[www.deltaww.com](http://www.deltaww.com)




### Technical features

Input Side	
Nominal Voltage	1~ 230Vac 50/60Hz
Input Source	1~ 200Vac - 277Vac
Power @ Free air	248 W
Power @ Max. load	430 W
Output Side	
Speed (RPM)	1500
Qmax. (CMH / CFM)	3635 / 2138
Pmax. (Pa / inAq)	504 / 2.02
Noise (dB-A) @ Qmax.	76.0
Functions	
Passive power factor correction	
Control input 0-10VDC / PWM	
Output +10VDC (±10%), max. 10mA.	
RS485 control bus	
Alarm relay, Locked rotor protection, Soft start.	
Voltage / Current monitoring.	

Physical	
Rotation Direction	CW, Seen on rotor
Material (Impeller / Frame)	Aluminum sheet / Die-cast aluminum
Bearing system	Ball bearings
Weight (kg)	7.2
Electrical leads	Lead wire
Environmental	
Operating temperature range	-25 ~ +60 °C
Storage temperature range	-40 ~ +70 °C
Safety	
Safety	UL , cUL , TUV
IP Level	IP54
EMC	EN61000-6-1/3 , EN61000-3-2/3
Protection class	I
Insulation class	B
Leakage current	<= 3.5 mA
Motor protection	Over temperature protected
Life expectance	60,000 hrs at 40 °C / 15 ~ 65 %RH

NOTE : Delta reserves the right to change specifications and other product information without prior notice.

P & Q curves

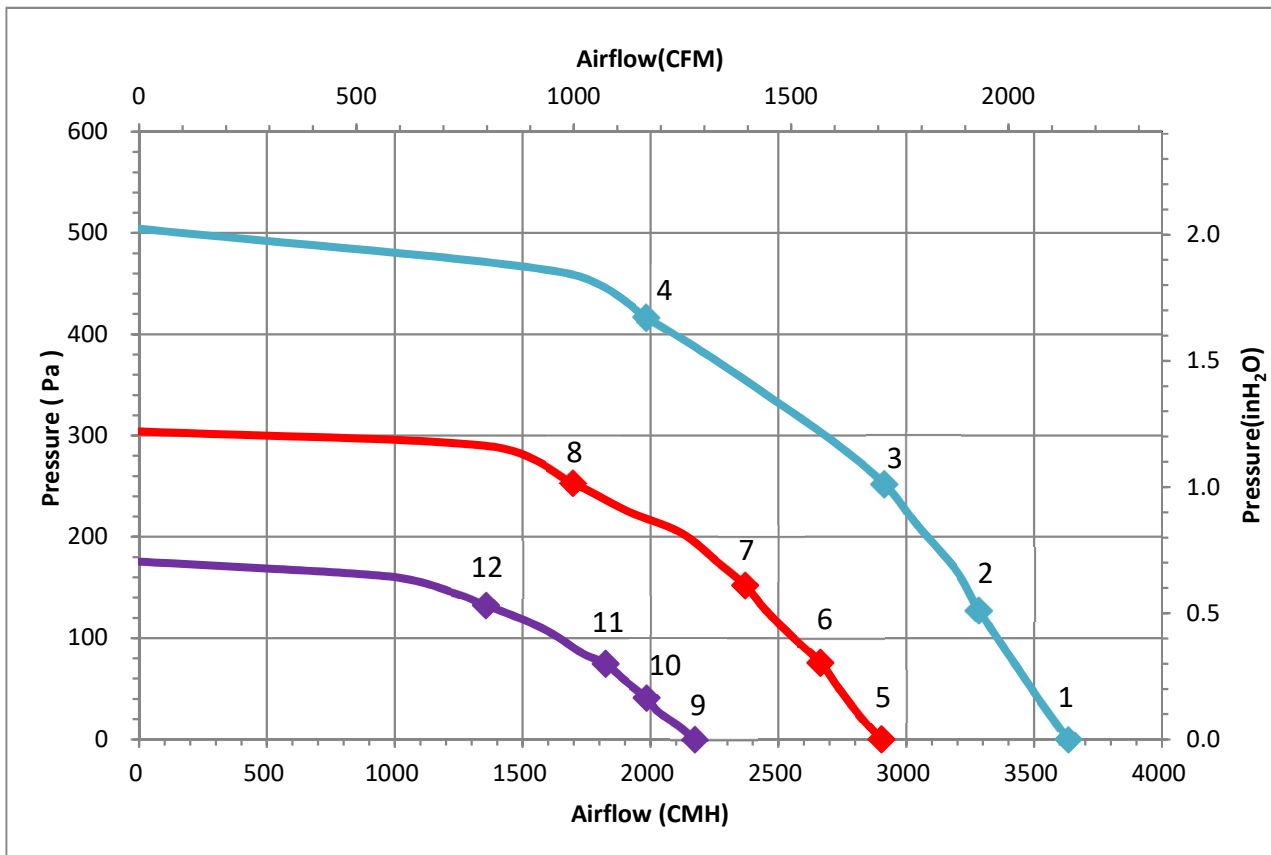

Measure data:

	P [Pa]	Q [CMH]	N [R.P.M.]	P1 [W]	I [A]	Lp [dB(A)]
1	0	3635	1499	248	1.47	76.0
2	128	3284	1499	328	1.94	
3	252	2916	1502	412	2.43	
4	417	1984	1482	424	2.51	
5	0	2903	1201	138	0.84	72.0
6	76	2665	1201	166	1.01	
7	152	2370	1205	208	1.27	
8	253	1697	1196	222	1.35	
9	0	2174	899	60	0.41	66.0
10	41	1985	903	76	0.52	
11	75	1825	902	88	0.60	
12	132	1357	895	96	0.65	

Test Condition :


- Input Voltage: Nominal Voltage
- Temperature : Room Temperature
- Humidity : 65%RH
- Measured with inlet cone.
- Noise (Lp) is measured at a distance of one meter from the inlet side.
- Testing method is compliance with ISO 3745.

ErP Directive:


	Actual	2015
Over all Eff (%)	61.7	47.4
Eff Grade N	76.3	62
Power (kW)	0.407	
Air flow (CMH)	2372	
Pressure (Pa)	343	
Speed (RPM)	1500	

Dimension drawing

Label :

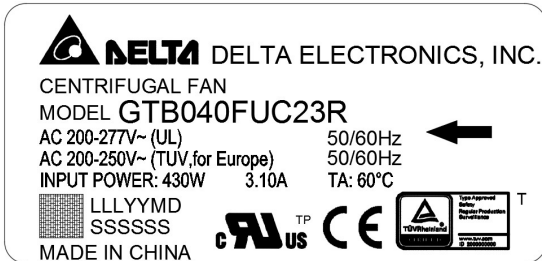

Fan :

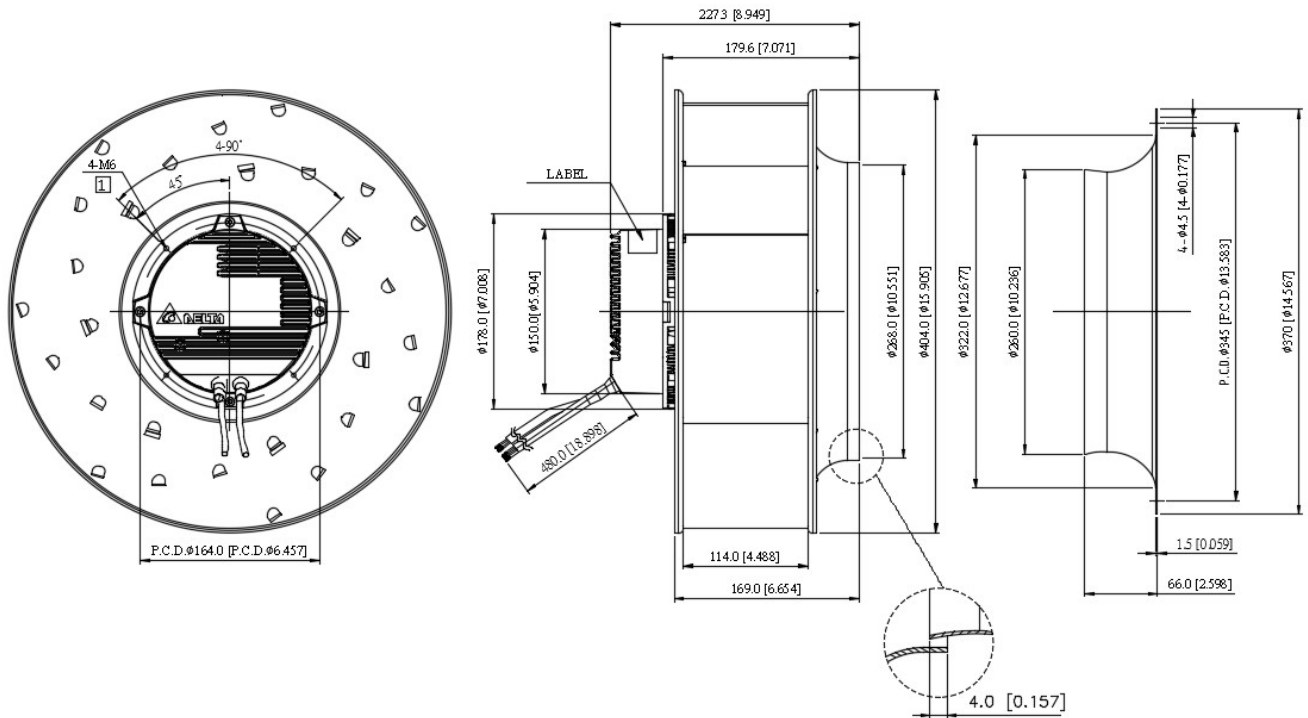


UNIT : mm[INCH]

Note :


- 1 Depth of screw : 6~8mm.


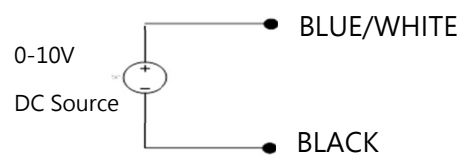
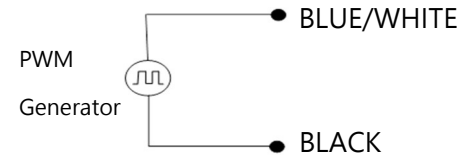
Definition of cable

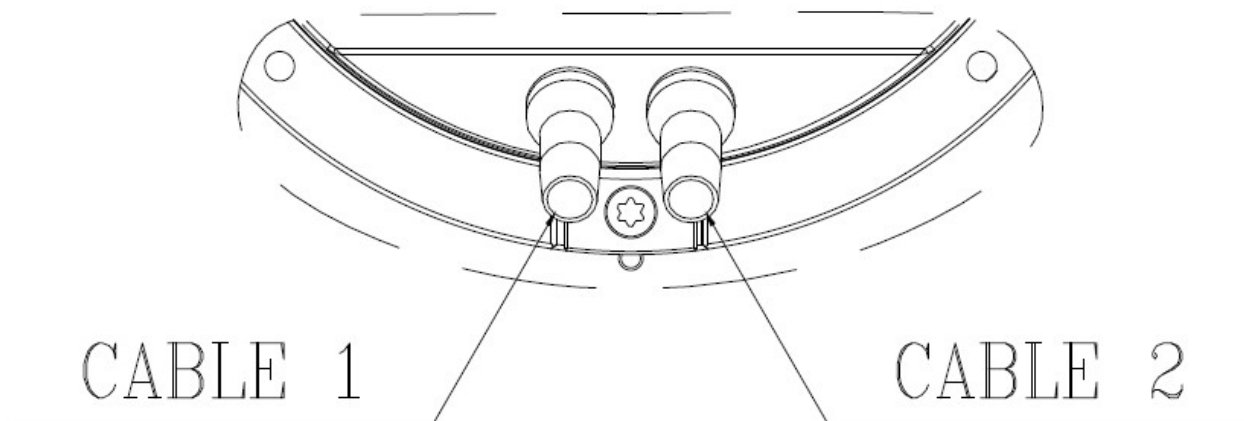

Cable	Wire type	Text	Functions
1	UL 2464 18AWG 3C	Brown	L
		Blue	N
		Green / Yellow	Earth
2	UL 2464 24AWG 7C	Red / Pink	+10V
		Blue / White	PWM
		Black	GND
		Green / Red	RS485-
		Green / White	RS485+
		Pink / Black	Relay 1
		Green / Black	Relay 2

Lead wire connection:

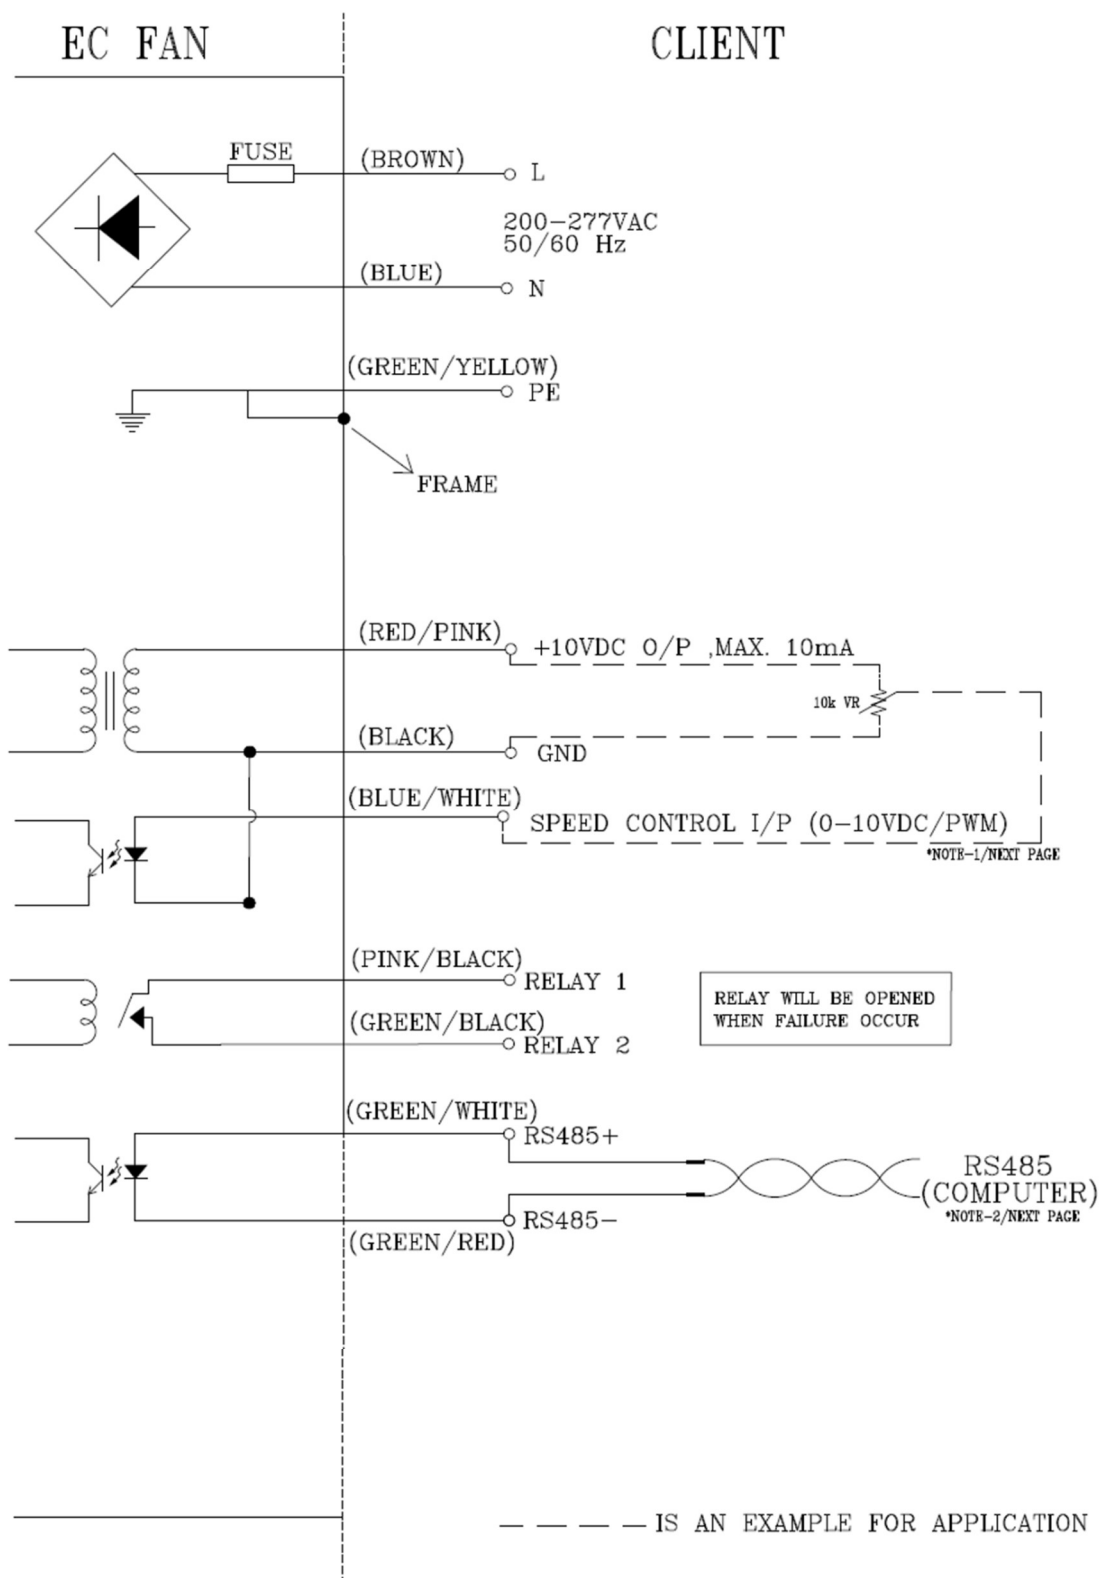


Speed setting	
<p><b>Full Speed</b></p> 	<p><b>Short RED / PINK &amp; BLUE / WHITE</b></p> <p>Fan will run full speed.</p>
<p><b>Voltage Control</b></p> 	<p><b>Use voltage source support 0~10VDC voltage</b></p> <p>DC+ : connect to BLUE / WHITE</p> <p>DC - : connect to BLACK</p> <p>-Voltage higher than 1.5 VDC, fan start up.</p> <p>-Voltage lower than 0.5 VDC , fan stop</p>
<p><b>PWM Control</b></p> 	<p><b>PWM duty control</b></p> <p>PWM amplitude is 10VDC(+/-5%)</p> <p>Frequency Range is 100Hz...100kHz</p> <p>-PWM duty higher than 15%, fan start up °</p> <p>-PWM duty lower than 5%, fan stop °</p>

Signal function																
<p><b>RS485 control function</b></p>	<p><b>RS485 control function</b></p> <p>-Select the control mode of speed, fixed speed or fixed PWM duty</p> <p>-Speed and power consumption feedback.</p> <p>-Allow multiple FANs control and status patrol.</p>															
<p><b>Voltage/PWM control</b></p>	<p>The speed comparison will control level</p> <table border="1"> <thead> <tr> <th>Voltage (V)</th> <th>PWM (%)</th> <th>Speed (RPM) (REF)</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0</td> <td>0</td> </tr> <tr> <td>1.5</td> <td>15</td> <td>420 ± 50 RPM</td> </tr> <tr> <td>6.0</td> <td>60</td> <td>1030 ± 8%</td> </tr> <tr> <td>9.5</td> <td>95</td> <td>1500 ± 5%</td> </tr> </tbody> </table>	Voltage (V)	PWM (%)	Speed (RPM) (REF)	0	0	0	1.5	15	420 ± 50 RPM	6.0	60	1030 ± 8%	9.5	95	1500 ± 5%
Voltage (V)	PWM (%)	Speed (RPM) (REF)														
0	0	0														
1.5	15	420 ± 50 RPM														
6.0	60	1030 ± 8%														
9.5	95	1500 ± 5%														
<p><b>Alarm state</b></p>	<p>Open with Failure (Relay1/Relay2)</p>															



Control Voltage VS. RPM Curve

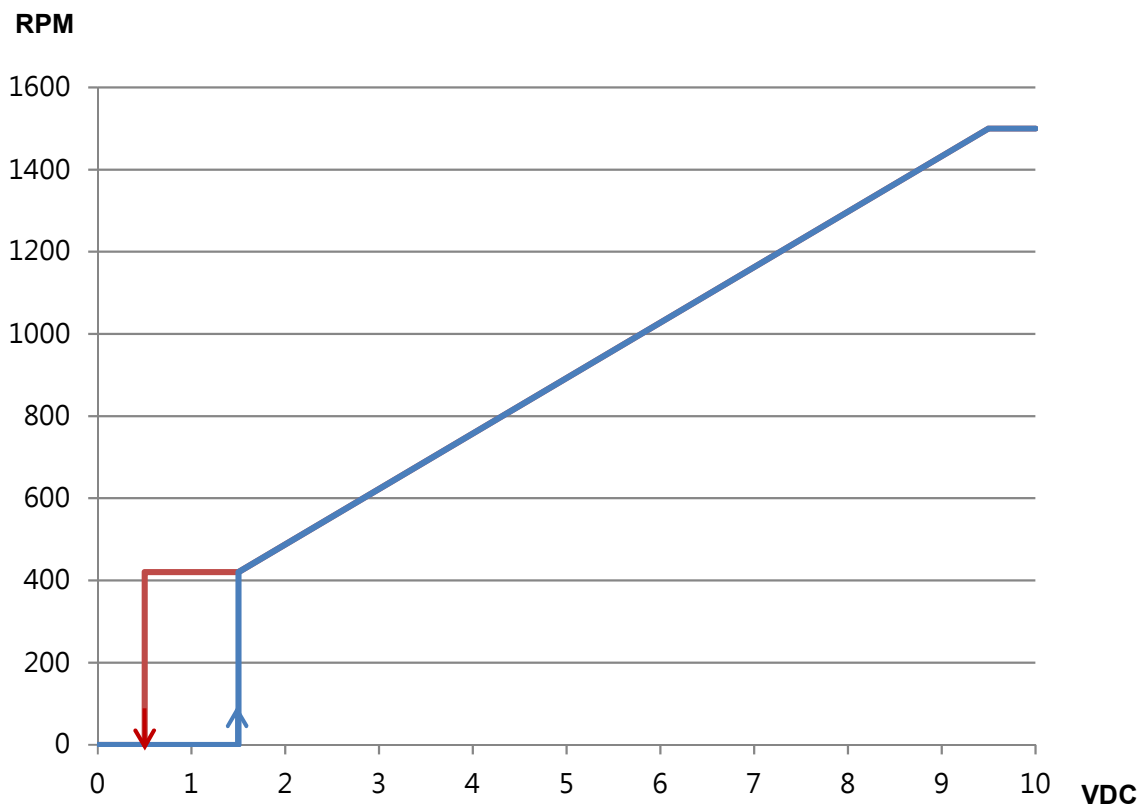

Voltage(VDC) , PWM duty (%)

Voltage	0	0.5	1	1.5	2	3	4	5	6	7	8	9	10	VDC
PWM duty	0	5	10	15	20	30	40	50	60	70	80	90	100	%

Protection Standard

ITEM	Standard
Rain	IEC 60529 IPX4
Dust/sand	IEC 60529 IP5X
Gas corrosion	GR-63-CORE
Salt mist	IEC 60068-2-11

FAN MATERIAL:

- ① Blades: Aluminum sheet
- ② Rotor: Steel with black electrodeposition coating
- ③ Pillow: Die-cast aluminum
- ④ Bottom Cover: Die-cast aluminum